

1

2

3



4

5

6

7

A

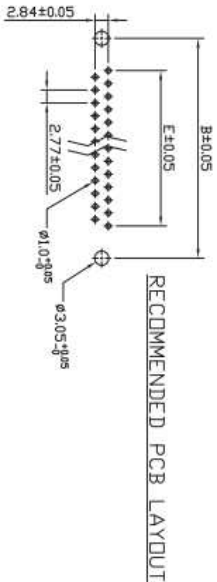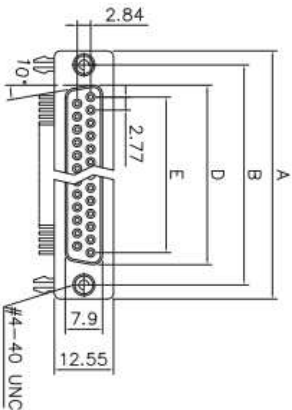

A

B



- Material:**
- Insulator: Glass Filled Thermoplastic PBT, UL94V-0
 - Contact plating: Copper alloy over Nickel
 - Shell: SPCC
 - Clinch Nut: Brass, Nickel plated
 - Boardlock: Brass, Tin plated

Electrical:

- Contact Resistance: 20mΩ Max @1A DC
 - Insulation Resistance: 1,000MΩ @500V DC
 - Dielectric Withstanding Voltage: 1,000V AC/rms 60Hz for 1 minute
- ①
- Current rating: 3 Amp
 - Voltage rating: 250V AC/rms 60Hz

C

D

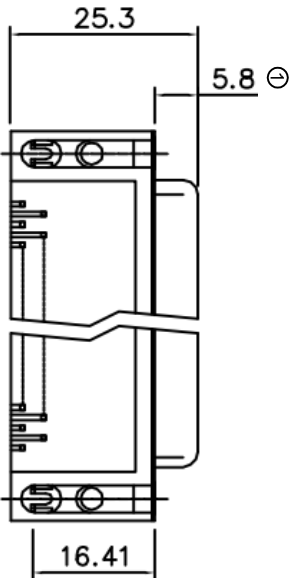

D

E

①
Dimensions

Positions	A	B	D	E
9	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

E

ADFFXA-KG-TXB5
 Contacts: 09, 15, 25, 37
 With Hex Stand-Off (S) or Without Hex Stand-Off (X)

F

RoHS compliant
Unit: mm

G

Scale	Free	Customer-No.	
TOLERANCE			
X.	±0.38	Drawn	23.05.2013
X.X	±0.25	Approved	05.06.2013
X.XX	±0.13		
DIM	TOL	Update	05.06.2013
X.°	±3°	Drawn	23.05.2013
X.X°	±1°		
Angle	TOL	Id.	Modification

G

ASSMANN WSW-No.
ADFFXA-KG-TXB5

Drawing-No.

ASS 5750 CO rev01

ASSMANN
WSW/ components

Replace

Sheet

1

2

3

4

5

6

7

H

SV3238