

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

HSTTPN 50 - 438 0 C

COLOR  
C = CLEAR

QUANTITY PER CARTON (48 IN ONLY)

X = 10pcs.  
O = 25pcs.  
L = 50pcs.

LENGTH

INCHES


4.38  
7.13  
7.5  
7.8  
9.3  
10.0  
48.0

FEET:  
C=100

TUBING SIZE - EXPANDED I.D.

HSTTPN = THIN WALL NON- CROSSLINKED PVC HEAT SHRINK

PANDUIT PART NUMBER	Min. Exp. I.D In. (mm)	Max. Rec. I.D In. (mm)	MIN RECOVERED WALL In. (mm)
HSTTPN50	0.462 (11.74)	0.250 (6.35)	0.022 (0.559)
HSTTPN62	0.562 (14.3)	0.313 (7.95)	0.027 (0.686)
HSTTPN75	0.697 (17.70)	0.375 (9.53)	0.027 (0.686)
HSTTPN100	0.900 (22.86)	0.500 (12.70)	0.030 (0.762)
HSTTPN150	1.395 (35.43)	0.750 (19.05)	0.030 (0.762)
HSTTPN200	1.800 (45.72)	1.000 (25.40)	0.039 (.991)

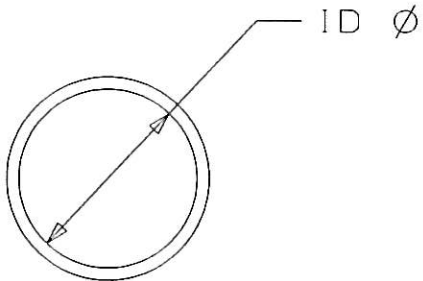

NOTES:

- SHRINK RATIO: 2:1
- MATERIAL: NON-CROSSLINKED PVC
- "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE."

DIMENSIONS IN BRACKETS ARE METRIC (mm)			
CAD FILENAME/LAYERS G03597HN_DC_GB02390C/OOA			
<b>PANDUIT</b> CORP. TINLEY PARK, ILLINOIS			
PVC NON-CROSSEDLINKED HSTTPN THIN WALL HEAT SHRINKABLE TUBING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.05 (1.3) (XXX) ±0.010 (0.25) (.XX) ±0.02 (0.5) ANGLES ±5°		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY T.SAMPLES	MAT'L:	SCALE NONE	
DATE 12-2-09	SEE NOTES	DRAWING NO.	DWG A
CHK'D <i>[Signature]</i>		GB02390C	SIZE

00A	12--09	TMSA	<i>[Signature]</i>	INITIAL RELEASE	GB02390C	00A	<i>[Signature]</i>		
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP		