

Customer Information Sheet

DRAWING No.: M50-91XXX42

SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

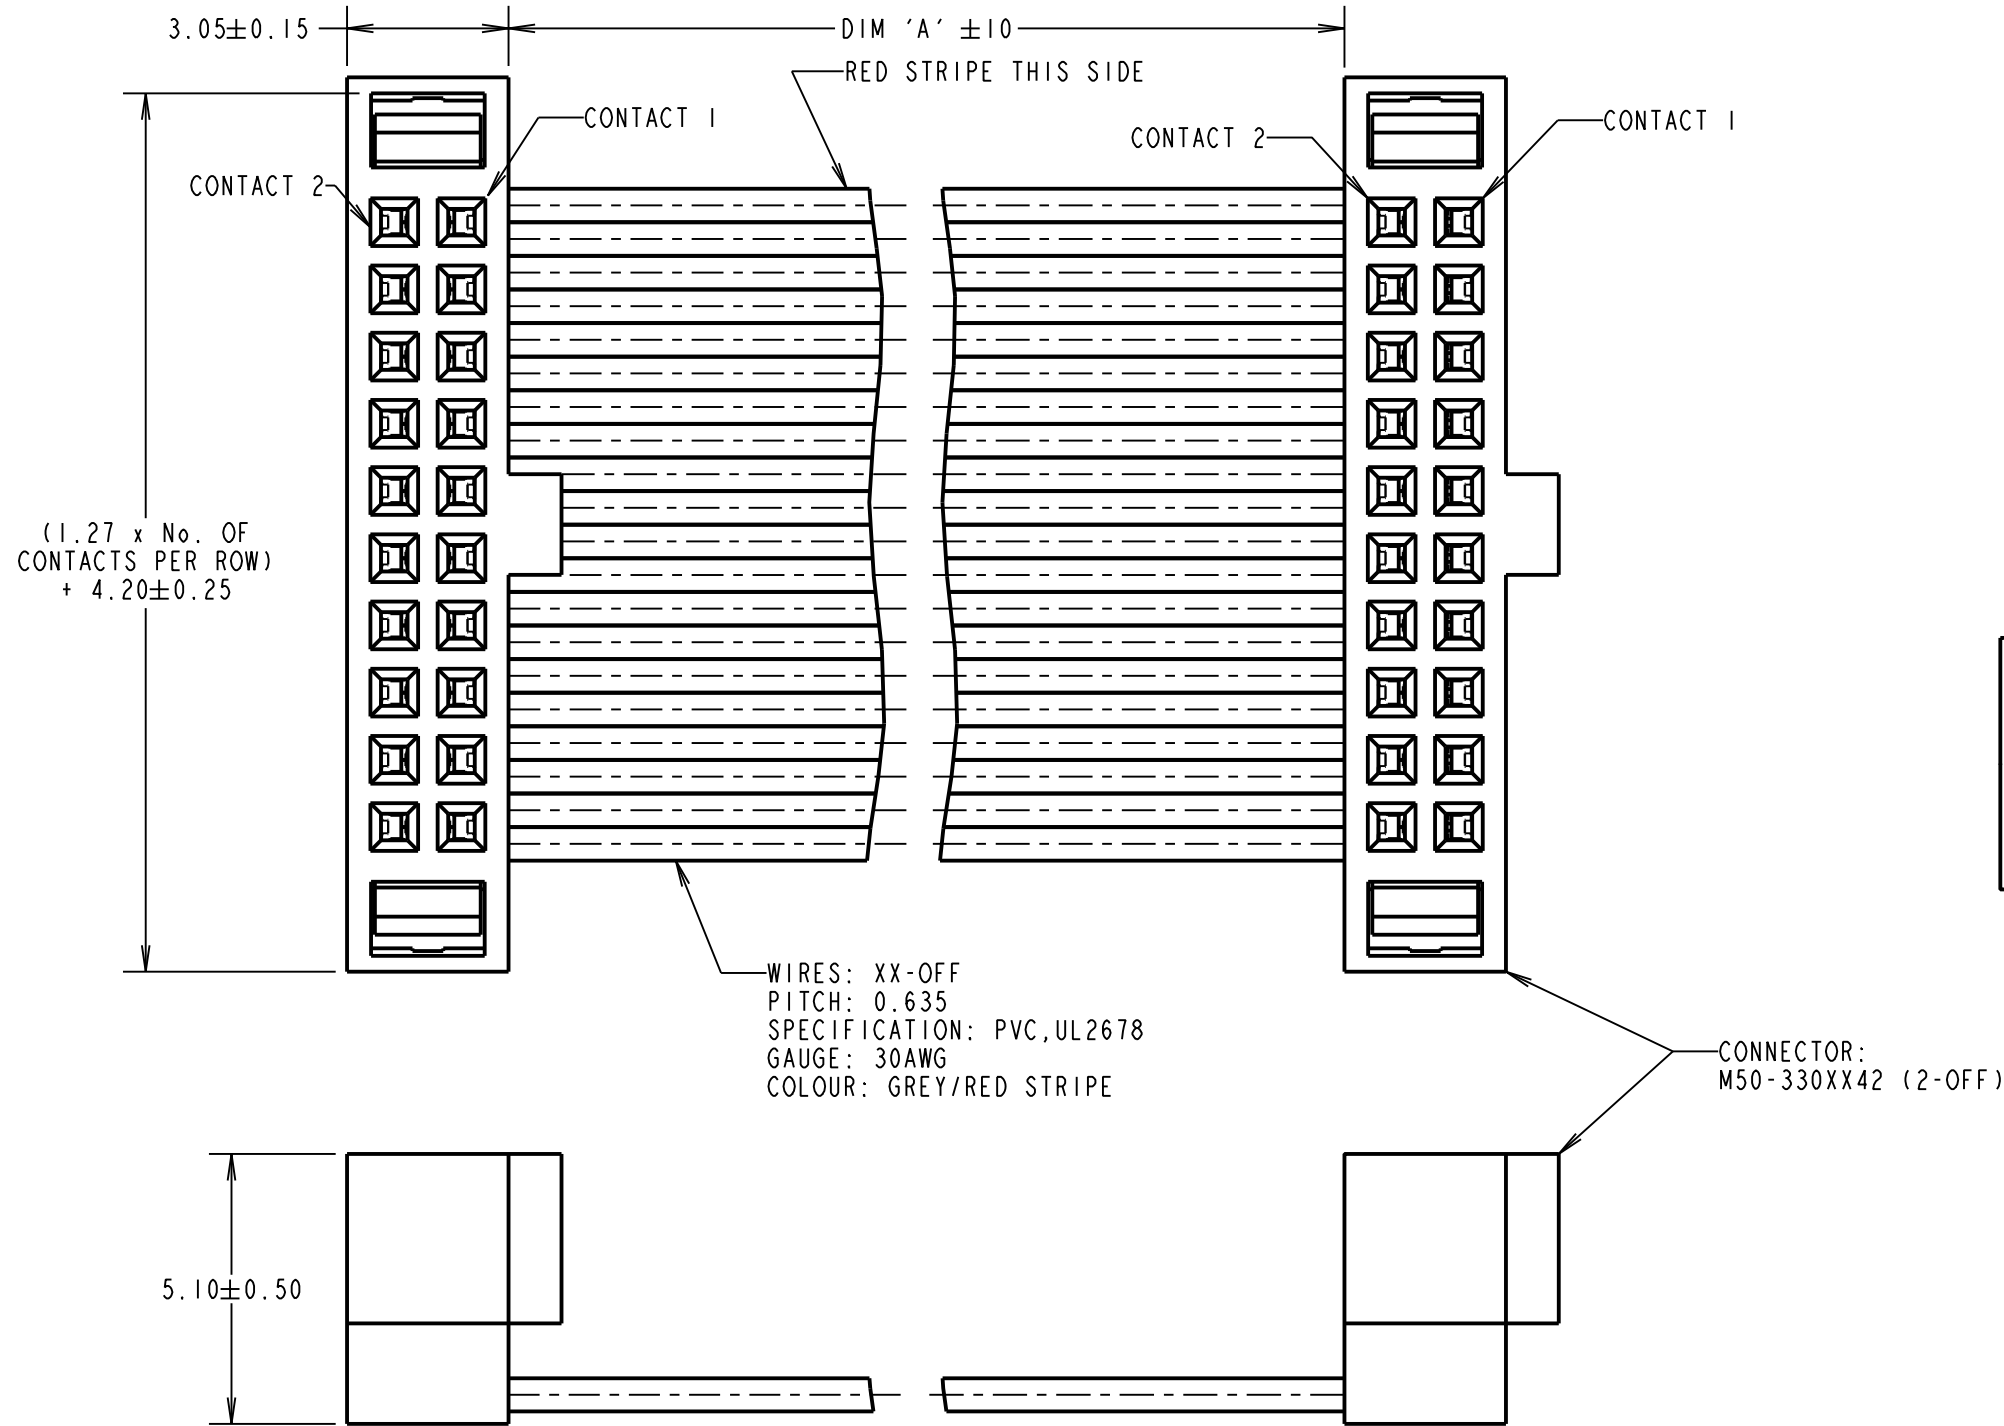

SPECIFICATIONS:
MATERIAL:
 MOULDINGS = PBT 30% G/F, UL94V-0, BLACK
 CONTACT = PHOSPHOR BRONZE
FINISH:
 CONTACTS: = 0.015-0.02µ MIN GOLD ON CONTACTS,
 2.54µ MIN 100% TIN ON TAILS,
 OVER 0.76-2.03µ NICKEL
ELECTRICAL:
 CONTACT RESISTANCE = 1.0Ω MAX
 VOLTAGE PROOF = 300V DC FOR 10 SECONDS
 INSULATION RESISTANCE = 5MΩ MIN
MECHANICAL:
 DURABILITY = 100 CYCLES MIN
 INSERTION FORCE = 1.0N MAX PER CONTACT
 WITHDRAWAL FORCE = 0.14N MIN PER CONTACT
ENVIRONMENTAL:
 TEMPERATURE RANGE = -20°C TO +105°C
PACKING:
 BAG
 FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C029XX (LATEST ISSUE)

ORDER CODE
M50-91XXX42
 DIM 'A':
 SEE TABLE
 No. OF CONTACTS PER ROW:
 05, 10, 13, 17, 20, 25

PART No.	DIM 'A'
M50-910XX42	150
M50-911XX42	300

MSP	6	11.08.16	13112
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		R.ADE	
CUSTOMER REF.:			
ASSEMBLY DRG:			

NOTES:
 1. CONNECTOR M50-330XX42 AND CABLE ARE RoHS AND REACH COMPLIANT.
 2. FOR CONNECTOR DETAILS SEE DRAWING M50-330XX42.

HARWIN
 www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL: SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE: 1.27mm PITCH IDC DIL SOCKET CABLE ASSEMBLY

DRAWING NUMBER: M50-91XXX42

SHT 2 OF 2