

3M™ DF100L Uniformity Tape

Technical Data Sheet

Release B, October 2013



Product Description

3M™ Uniformity Tape ("UT" or "Product") is a clear, microstructured thin-film that mixes and diffuses light generated by LEDs in edge-lit lighting. UT is applied directly to the injection edge of a Light Guide Plate (LGP), which faces the LED light sources. The Product has adhesive on one side, a micro-replicated optical pattern on the other.

UT's microstructure reduces dark zones and improves brightness uniformity by inducing lateral light spreading in the plane of the light guide near the light source.

Recommended End Uses

LED solid light guides and wave guides for architectural and commercial lighting.

Key Attributes

- Improves brightness uniformity and light spreading near light source
- Reduces head-lighting effect
- Enables uniformity at increased LED spacing, potentially reducing LED costs
- Potential for improved thermal management
- Simple tape application to light injection edge(s) of LGP
- Registration to LEDs not required

Product Characteristics


Values in this section are typical values for UT, based on test data deemed reliable, but not warranted, except for the Warranted Characteristics identified on Page 4.

Material

Substrate	Polyester Film
Prism Layer	Acrylic Resin
Adhesive	Acrylic PSA

Structure

Prism-shaped acrylic resin optical features formed on polyester film substrate.

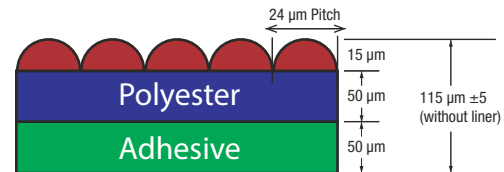

Cross section image not to scale. Values in this section are typical values, but not property limits.

Part Dimension

UT Tape Width	Strips Per Roll	Roll Length
2.8 mm (0.111 inch)	15	50 meters (54.68 yds)
3.8 mm (0.150 inch)	11	50 meters (54.68 yds)
4.8 mm (0.189 inch)	9	50 meters (54.68 yds)
5.8 mm (0.228 inch)	7	50 meters (54.68 yds)
7.8 mm (0.307 inch)	5	50 meters (54.68 yds)

Optical

Transmission	Greater than 90%
Color Shift 0°	Δx : -0.003 to 0.003 Δy : -0.003 to 0.003
Color Shift 60°	Δx : -0.003 to 0.003 Δy : -0.003 to 0.003
Lighting Panel Uniformity	Greater than 80%
Light Spread Angle	$\pm 70^\circ$ from the normal



Adhesion

No delamination.

Item (adhesion to acrylic light guide)		Adhesion (g/0.5")
Initial adhesion		1048
Adhesion after thermal shock (100 cycles)		1740
After 85° C	1000 hours	1630
After 65° C at 95%RH	1000 hours	1320

Environmental

Test	Condition
Humidity resistance	65°C, 95% relative humidity for 1000 hours
Heat resistance	85°C for 1000 hours
Cold resistance	-40°C for 1000 hours
Thermal shock	85°C for 1 hr to -40°C for 1 hr, 100 cycles
Appearance	No significant appearance change in application
Spread angle	No significant difference in spread angle
Change of transmission	Minimum 80% vs. initial value
Change of color	Maximum 2.0 in DE vs. initial value

- Wear gloves to prevent fingerprints or nail marks.
- Hold UT by the edges.
- Do not rest objects on UT.
- Do not slide UT.

Warranted Characteristics

Characteristic	Value	Test
Transmission	> 90%	ASTM D1003-00
Color change - Color shift 0° Color shift 60°	Δx : -0.003 to 0.003 Δy : -0.003 to 0.003 Δx : -0.003 to 0.003 Δy : -0.003 to 0.003	ASTM E 1164
Light spread	$\pm 70^\circ$ horizontally	3M Test

Cleaning

Do not dust or clean the UT. The prisms are easily damaged.

Recommended Storage and Handling

UT should be stored flat, in its original packaging, away from direct sunlight. If UT is dedicated to LEDs, there should be no UV damage. UT is stored at a temperature of $20 \pm 10^\circ\text{C}$, relative humidity $45 \pm 15\%$. The recommended temperature range during application is $20 \pm 10^\circ\text{C}$, relative humidity $45 \pm 15\%$.

To prevent marking, denting, or deforming of the UT surface:



3M Architectural Markets 3M U.S.

3M Center
Building 220-7W-07
St. Paul, MN 55144-1000
1-888-650-3497
3MArchitecturalMarkets.com

3M Canada

1840 Oxford St E
London, ON N5V 3R6
1-800-265-1840

3M Architectural Markets 3M Europe

Hermeslaan 7
1831 Diegem
Belgium
www.3M.eu/ArchitecturalMarkets

3M Architectural Markets 3M Italia, S.p.A.

Via Nortberto Bobbio, 21
20096 Pioltello MI
Tel. 02.7035.2517
www.dubic.it

3M India Limited Architectural Markets Department

Concorde Blook, UB City
24 Vittal Mallya Road, Bangalore 560 001
Tel: 080 2223 1414 Fax: 080 2223 1450
3minteriors.in@mmm.com
www.3M.com/in/interiors
www.spacesunleased.com

3M Architectural Markets 3M Gulf

PO Box 20191, Dubai Internet City
Building @ 11
Dubai, United Arab Emirates
Tel. 971 4 3670 777
Fax 971 4 3670 998

3M is a trademark of 3M Company. © 3M 2013. All rights reserved. Please recycle.