

2.0×1.6mm for Consumer Products/ Mobile Communications



RoHS Compliant

Features

- Crystal unit for Consumer Products
- Ultra-miniature and low profile (2.0×1.6×0.40mm)
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products
- Mobile Communications, Bluetooth®, Wireless LAN

* Bluetooth® Trademarks are owned by Bluetooth SIG Inc.

How to Order

CX2016DB 27000

- ① Series
 ② Frequency
 ③ Load Capacitance ④ Frequency Tolerance
D0 8 pF **G** ±15×10⁻⁶
 ⑤ Operating Temp. Range ⑥ Frequency Temp. Stability
EJ -10 to +70°C ±15×10⁻⁶
LJ -30 to +85°C ±15×10⁻⁶
 ⑦ Individual Specification

Packaging (Tape & Reel 1000/ 3000/ 15000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	16000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f _{tol}	±15	×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-10 to +70	°C	-30 to +85
Storage Temp. Range	T _{stg}	-40 to +85	°C	
Frequency Temp. Characteristics	f _{tem}	±15	×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
16000 ≤ f _{nom} < 18000 kHz	200Ω max.
18000 ≤ f _{nom} < 26000 kHz	150Ω max.
26000 ≤ f _{nom} < 40000 kHz	60Ω max.
40000 ≤ f _{nom} ≤ 60000 kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
16000 ≤ f _{nom} ≤ 60000 kHz	10μW (100μW max.)

Dimensions

(Unit: mm)

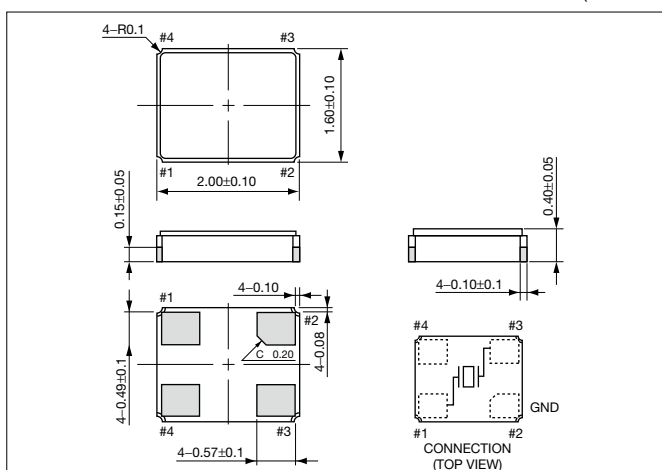

Recommended Land Pattern

(Unit: mm)

