

A


B

C

D


E

F

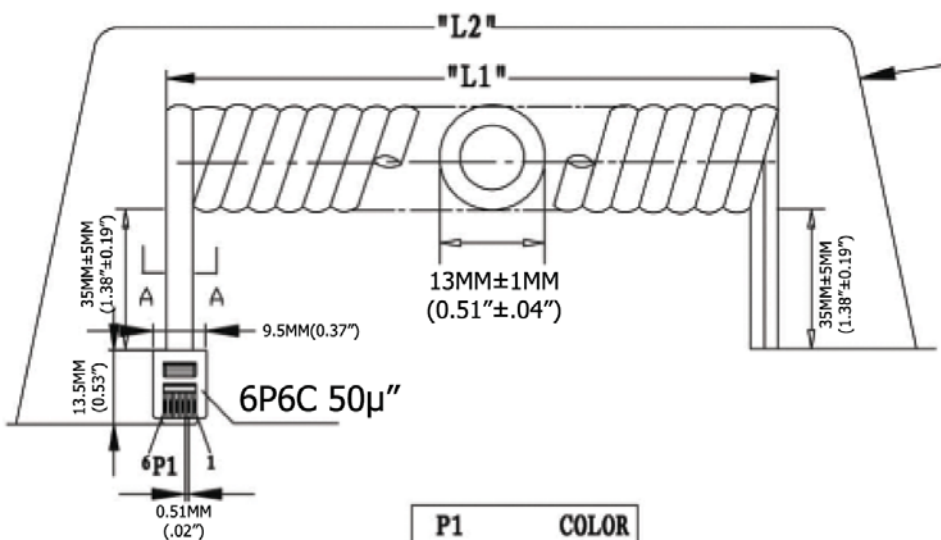

Extended length is with 500g of force

P1	COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

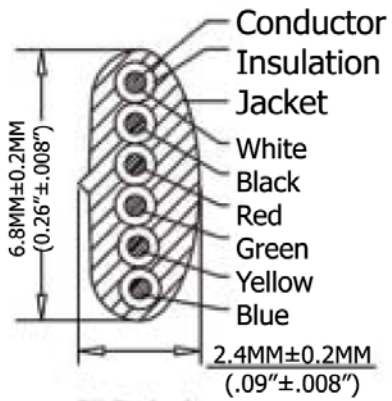

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	29.5 Inches
2,133.6MM-2,453.64MM	749.3MM

SBC: A-A

G

H



Scale	1:1					Name	Item No. AT-C-26-6/6/B-7-OE
TOLERANCE				Drawn	11.02.11	Chappell	
X.X	±0.40			Approved			Title NON-UL 26AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Single Plug, 50µ" of contact plating, BLACK
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet
				Modification	Date	Name	

