


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

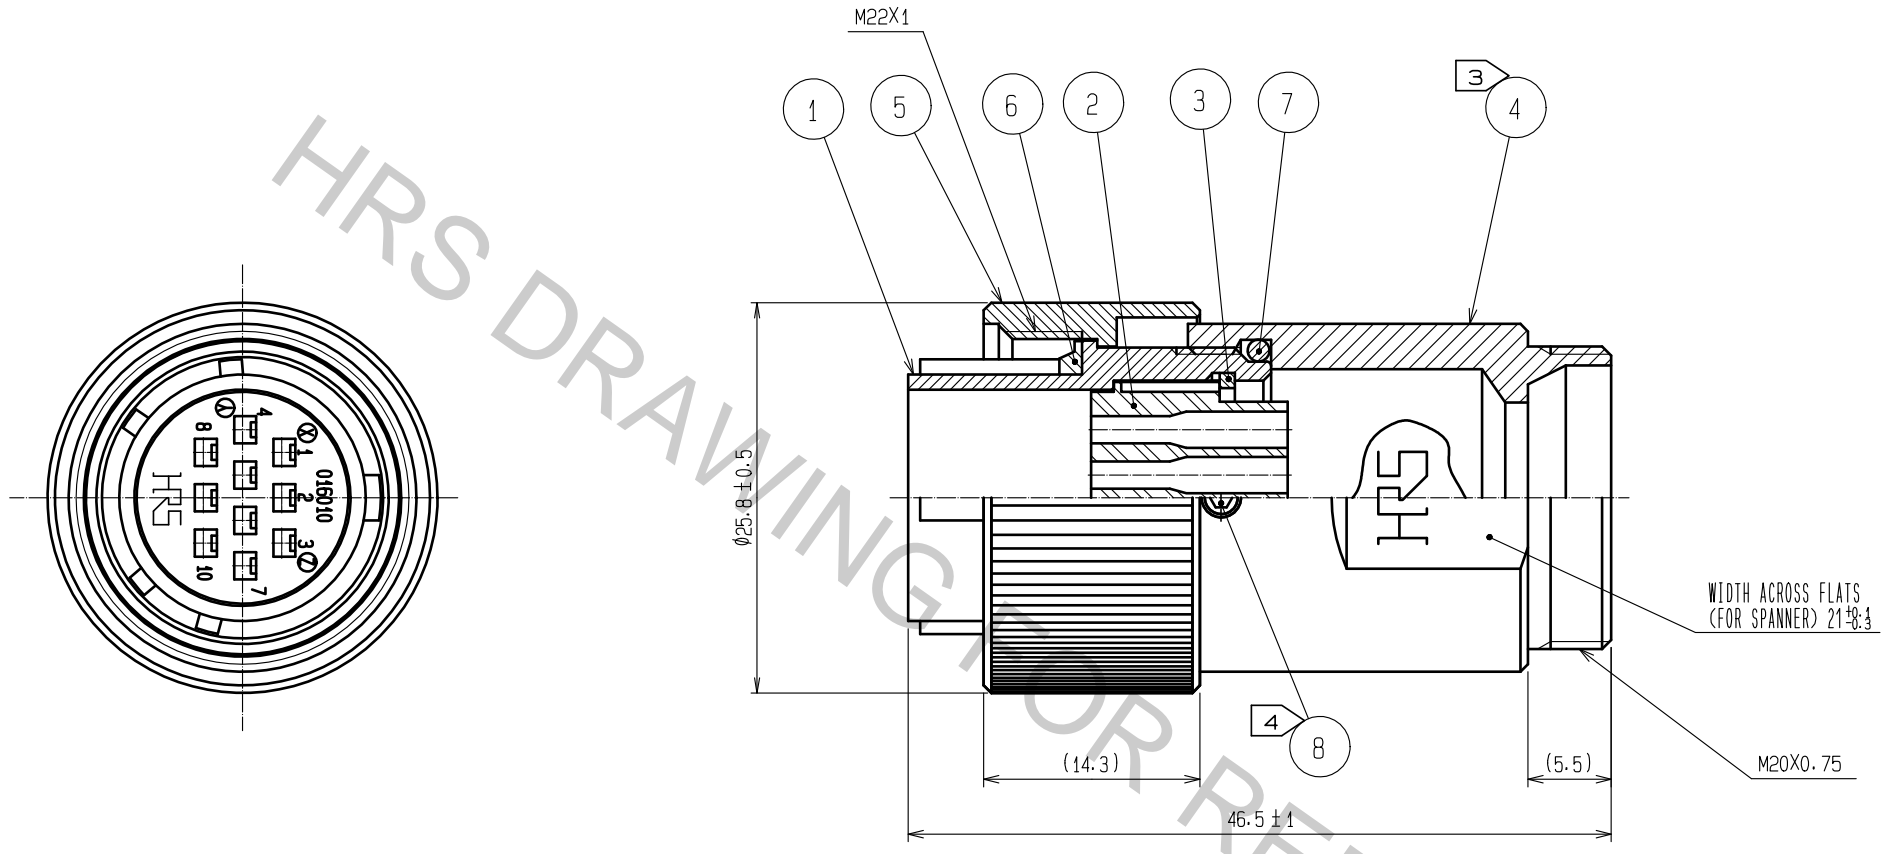

- NOTES 1 APPLICABLE CRIMP CONTACT: JRC-PC2-212(AWG#20 TO 24)
 JRC-PC2-222(AWG#24 TO 28)
- 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL): RM-TP(CL150-0008-7)
- ③ THE RECOMMENDED CLAMP TORQUE, REF. NO. ④: 3 TO 3.5N · m.
- ④ THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑧: 0.2 TO 0.25N · m.
- 5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ④ TO REF. NO. ① IS SHOWN.
- 6 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR16WCC-※.
 ※ DESIGNATE DIAMETER OF APPLICABLE CABLE.
- 7 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
 DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	BRASS	BLACK CHROME PLATING	8	STAINLESS STEEL	
3	PHOSPHOR BRONZE	NICKEL PLATING	7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	POLYCARBONATE	(BLACK) UL94V-0	6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
1	ALUMINUM ALLOY	BLACK CHROME PLATING	5	BRASS	BLACK CHROME PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KOBAYASHI			18.02.26	DRAWING NO. EDC-110650-31-00		
CHECKED : HY. KOBAYASHI			18.02.26	PART NO. JR16WP-10PC(31)		
DESIGNED : TH. KAMEYA			18.02.24	CODE NO. CL114-2114-1-31		
DRAWN : MK. INOUE			18.02.14	1/1		