

Technical specification :

Rated voltage: 30 V
IEC 61076-2-104

Current rating: 3 A bei 40°C
IEC 61076-2-104

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +80°C
EN 60512-11-10
-40°C ... +85°C
EN 60512-11-4

Mating cycles: >=100
IEC 60512-9a

Cable specification:

Temperatur range:
static -30°C ... +80°C
flexibel -15°C ... +80°C

Numbers of cycles: >= 4 Mio. at 3 m/s

Materials:

Contact: CuZn, Ni b / Au 0,2 gal.

Contact carrier: PA, UL 94 V-0

Sealing: FPM

Coupling nut: GD-Zn, Nickel plated


Moulding body: TPU, UL 94 HB, translucent

Installation specification:

Recommended torque: 0,4 Nm

Conec installation tool: Torque wrench: 36-000200
Insert across flats 9: 36-000210

Contact assignment:

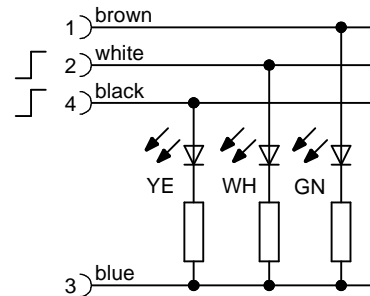

Part no:	Description:	Length L:	Cable:
42-10464	SAL - 8 - RKW4 - 3L - 2 / K1	2m	TPU, UL 20549, black, 4x0,25mm ² Cable: 781-K12400
42-10465	SAL - 8 - RKW4 - 3L - 3 / K1	3m	
42-10466	SAL - 8 - RKW4 - 3L - 5 / K1	5m	
42-10467	SAL - 8 - RKW4 - 3L - 10 / K1	10m	
42-xxxxx	SAL - 8 - RKW4 - 3L - ... / K1	x	

DO NOT ALTER CAD DRAWING BY HAND RoHS & REACH compliant	Index b: 13.07.2015 rch Ä5717 Change to BIG-Moulding body, data sheet modified	dim. in mm		title: Female connector M8x1 angled with LED
		date	name	
	tolerance of cable: L ≤ 4m: L + 40mm L > 4m: L + 1%	drawn 14.10.08	Mankopf	dwg no: 42K1A095
	general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm x ± 5°	appd. 14.10.08	Fromm	
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			CONEC [®]	
				part no: