

▶ QUARTER-TURN LOCKS

QUARTER TURN - SPRING LOADED

760



IP 65



LH/RH



RoHS



- Specially designed internal spring provides 1.5mm of compression.
- Cam does not rotate beyond quarter turn due to stop lip.

APPLICATIONS

Electric panels, machinery covers,

MATERIAL

HOUSING: PA6 GFR 30
 DRIVER: Zamak DIN-EN 1774-ZnAl4Cu1 or PA6 GFR 30
 CAM: Steel or plastic
 GASKET: Polyurethane

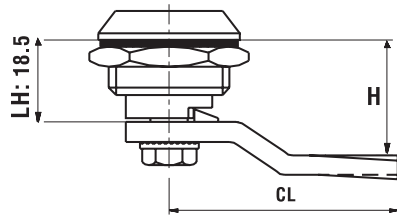

760 20-11-DD-CC
 DD: ZAMAK - CHROME




760 20-12-DD-CC
 DD: ZAMAK - BLACK




760 20-20-DD-CC
 DD: PLASTIC



Sealing in plastic housing.
 This application aims to improve the sealing level in quarter turns.



PRODUCT CODE

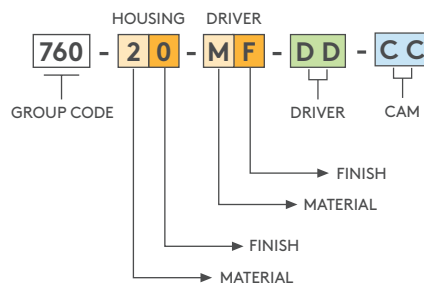

- For cams please check pages: 144 - 145
- For drivers please check page: 166
- For keys please check pages : 162 - 163