


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86		A1	REVISED PER ECO-11-024755	13DEC11	KH	DR

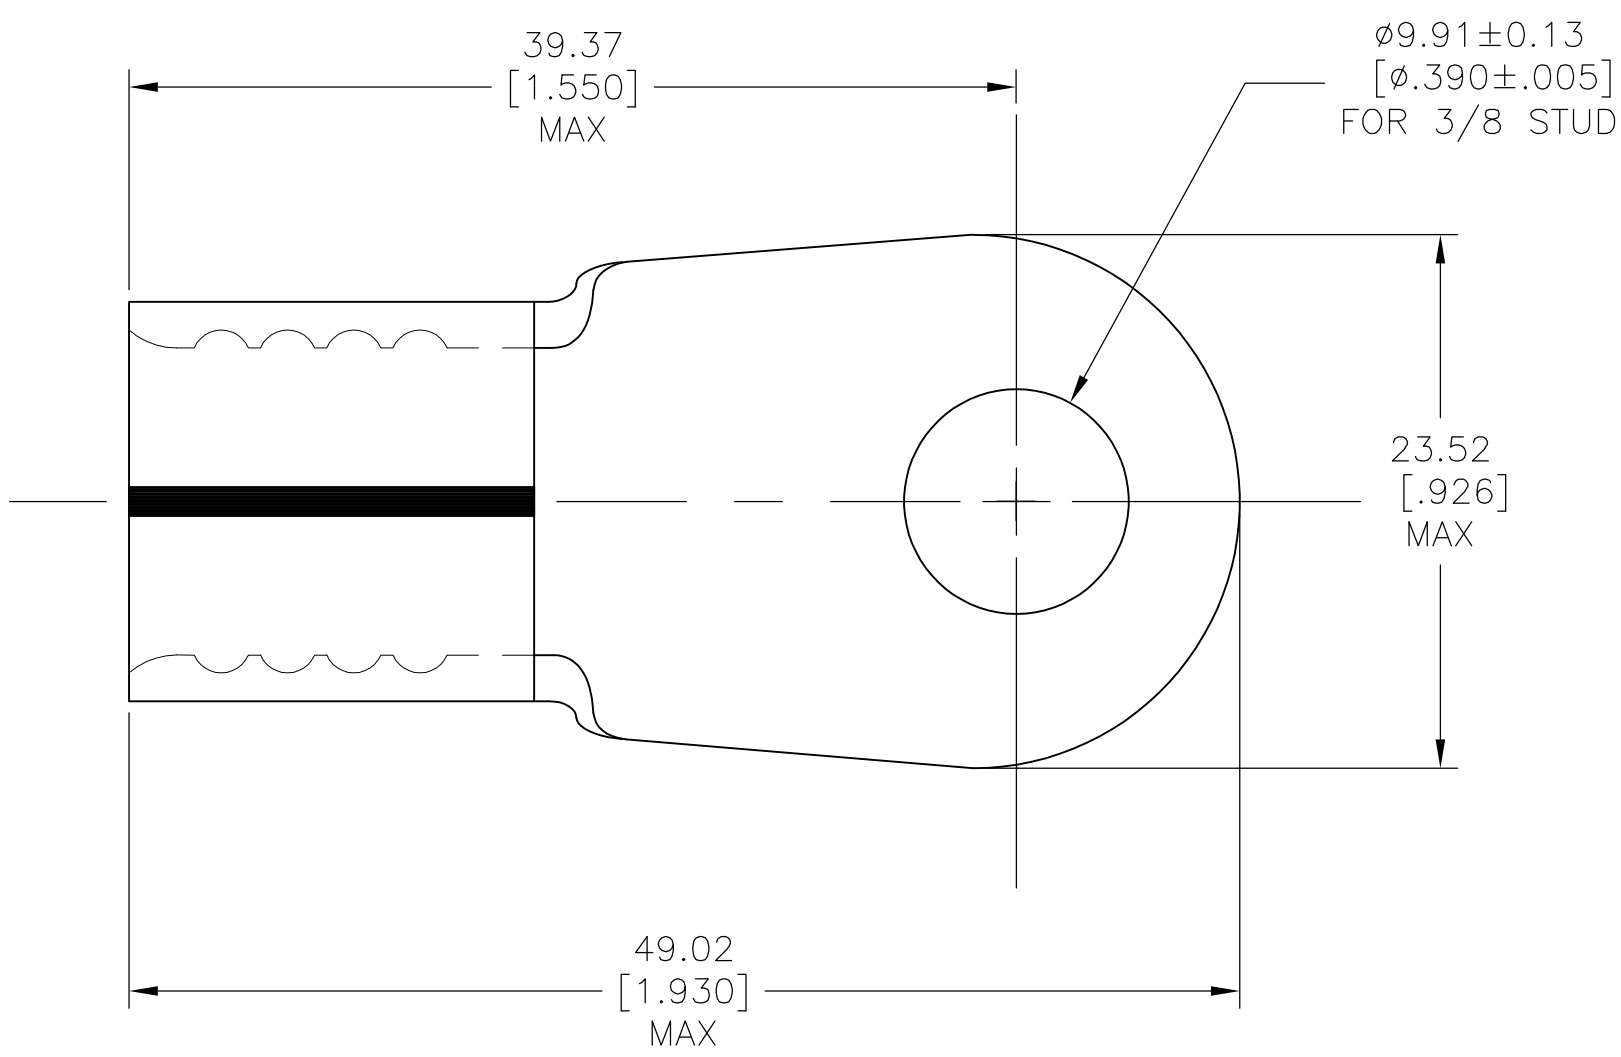

- 1 WIRE RANGE IS FOR 2/0 AWG STANDARD. WIRE CROSS SECTIONAL AREA RANGE: 119,500-150,500 CMA, STRANDED WIRE
- 2 THE TONGUE THK IS 2.03±0.076[.080±.003]
- 3 RECOMMENDED OPERATING TEMP -55°C TO +200°C FOR HEAT SHRINK TUBING

1	6-1192857-2	HIGH AND LOW TEMPERTURE CROSS LINKED FLOUROPOLYMER HEAT SHRINK TUBING 19.05[.750]MIN IDX44.45±3.05[1.75±.12] RT555-3/4-0-SP
1	321871-2	TERMINAL BODY: COPPER PER ASTM B-152 ANNEALED FINISH: NICKEL PLATE .000300 MIN THK PER SAE AMS QQ-N-290
-1	PART NO	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 08DEC09	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK TOM MICHIELUTTI 08DEC09	NAME HEAT RESISTANT TERMINAL KIT		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD TOM MICHIELUTTI 08DEC09	PRODUCT SPEC -		
0 PLC ± -		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO G-696650
1 PLC ± -		RESTRICTED TO -	SCALE 3:1		
2 PLC ± -		WEIGHT -	SHEET 1 OF 1		
3 PLC ± -		CUSTOMER DRAWING	REV A1		
4 PLC ± -					
ANGLES ± 1°					
FINISH -					