


SIGN	DATE	DESCRIPTION	APPROVER

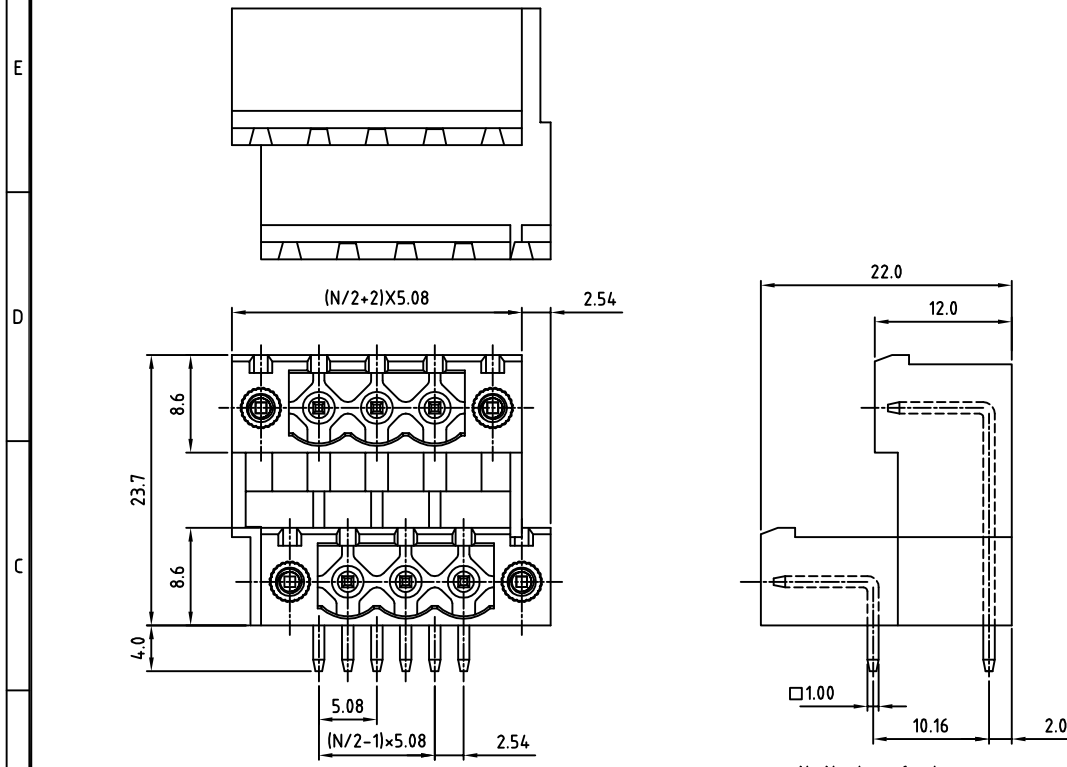


- Material**
- Contact pin: Brass
 - Surface of solder tail: Tin plated
 - With flange nut: brass M2.5
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical**
- Voltage rating: 300VAC
 - Current rating: 15A
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety approval: (cULus) pending
 - RoHS Compliant

PART NUMBER:
OSTVFXX5251

No. of Poles →

04: 2x02 Poles	COLOR
06: 2x03 Poles	0: Black
: :	5: Green (Standard)
48: 2x24 Poles	6: Blue
	8: Grey

P.C.B LAYOUT

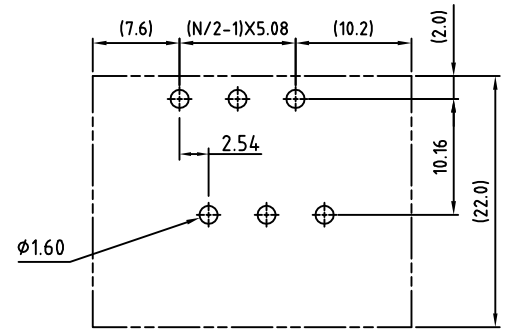

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTVF-5.08mm Series right-angle W/Flange 2x2p-2x24p				
PART NO.	OSTVFXX5251	DWG NO.		OSTVFXX5251.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.11.07	Marvin 2006.11.07	Marvin 2006.11.07	Marvin 2006.11.07		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV.: C	X.XX ±0.10
						X° ±1°