
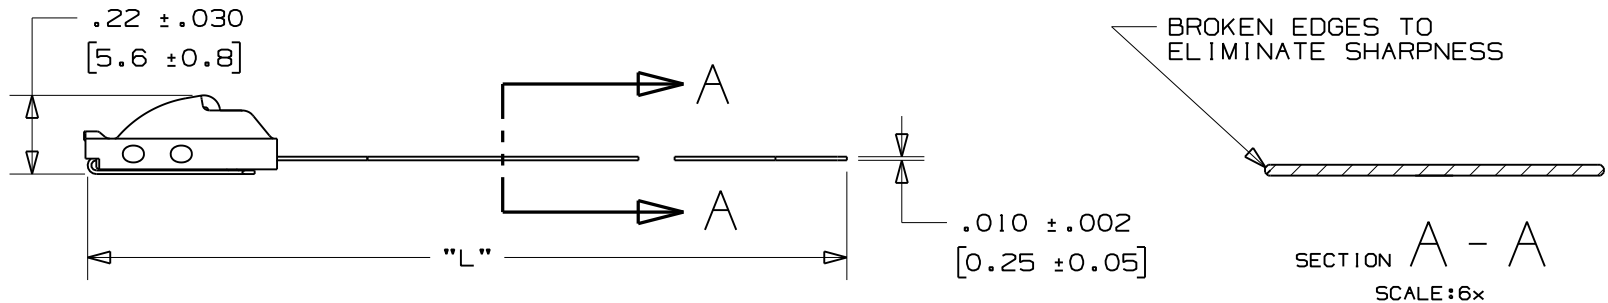


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH L ±.3 (7)
© MLT1H-LPAL	50	1" (25)	5.5" (140)
MLT2H-LPAL	50	2" (51)	7.9" (201)
MLT4H-LPAL	50	4" (102)	14.3" (362)

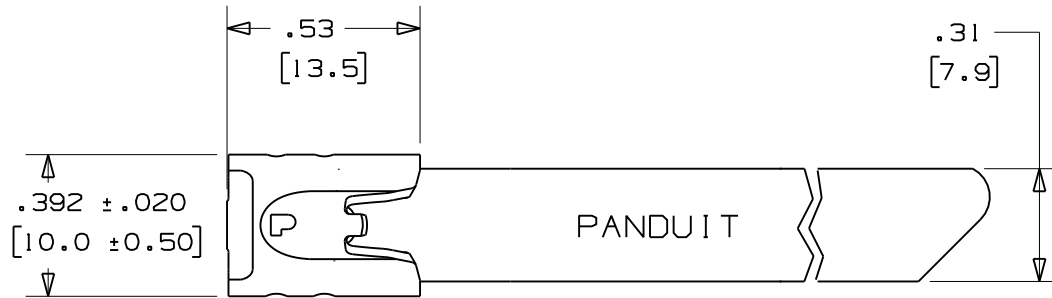

NOTES:

- Ⓐ 1.) APPLICATION TOOLS - ST2MT, ST3MT & HTMT.
- Ⓓ 2.) MINIMUM LOOP TENSILE STRENGTH - 50 LBS. (222 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) [ ] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:
  - .XXX = ±.010 (.25)
  - .XX = ±.02 (.5)
  - .X = ±.03 (.8)
  - ANGLES = ±2°
- Ⓑ 5.) MATERIAL: ALUMINUM 5052

REV	DATE	BY	CHK	DESCRIPTION	ECN #
03	11/06	JAMB	EJD	Ⓓ REMOVED APPLICATION TOOLS GS4MT & PPMT FROM NOTE 1	SS00280
02	1/06	JMMR	EJD	Ⓒ ADDED PART NUMBER MLT1H-LPAL TO TABLE	SS00124
01	9/05	JAMB	EJD	Ⓐ ADDED ALL APPLICABLE APPLICATION TOOLS TO NOTE 1 Ⓑ MAT'L. WAS ALUMINUM 5052-H34	SS00056
00	8/05	JAMB	EJD	DRAWING RELEASED	SS00032

S41215\_03

**PANDUIT**

CORP. TINLEY PARK, ILLINOIS

METAL LOCKING TIE  
HEAVY SERIES - ALUMINUM  
(CUSTOMER DRAWING)

DRAWN BY JAMB	CHK'D EJD	SCALE 2x	DRAWING NO. S41215
------------------	--------------	-------------	-----------------------