



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH +/- .3" [7]
⑧ MLT2EH-LP316	2" [51]	50	11.8" [300]
MLT4EH-LP316	4" [102]	50	17.1" [434]
MLT6EH-LP316	6" [152]	50	23.4" [594]
MLT8EH-LP316	8" [203]	50	29.7" [754]

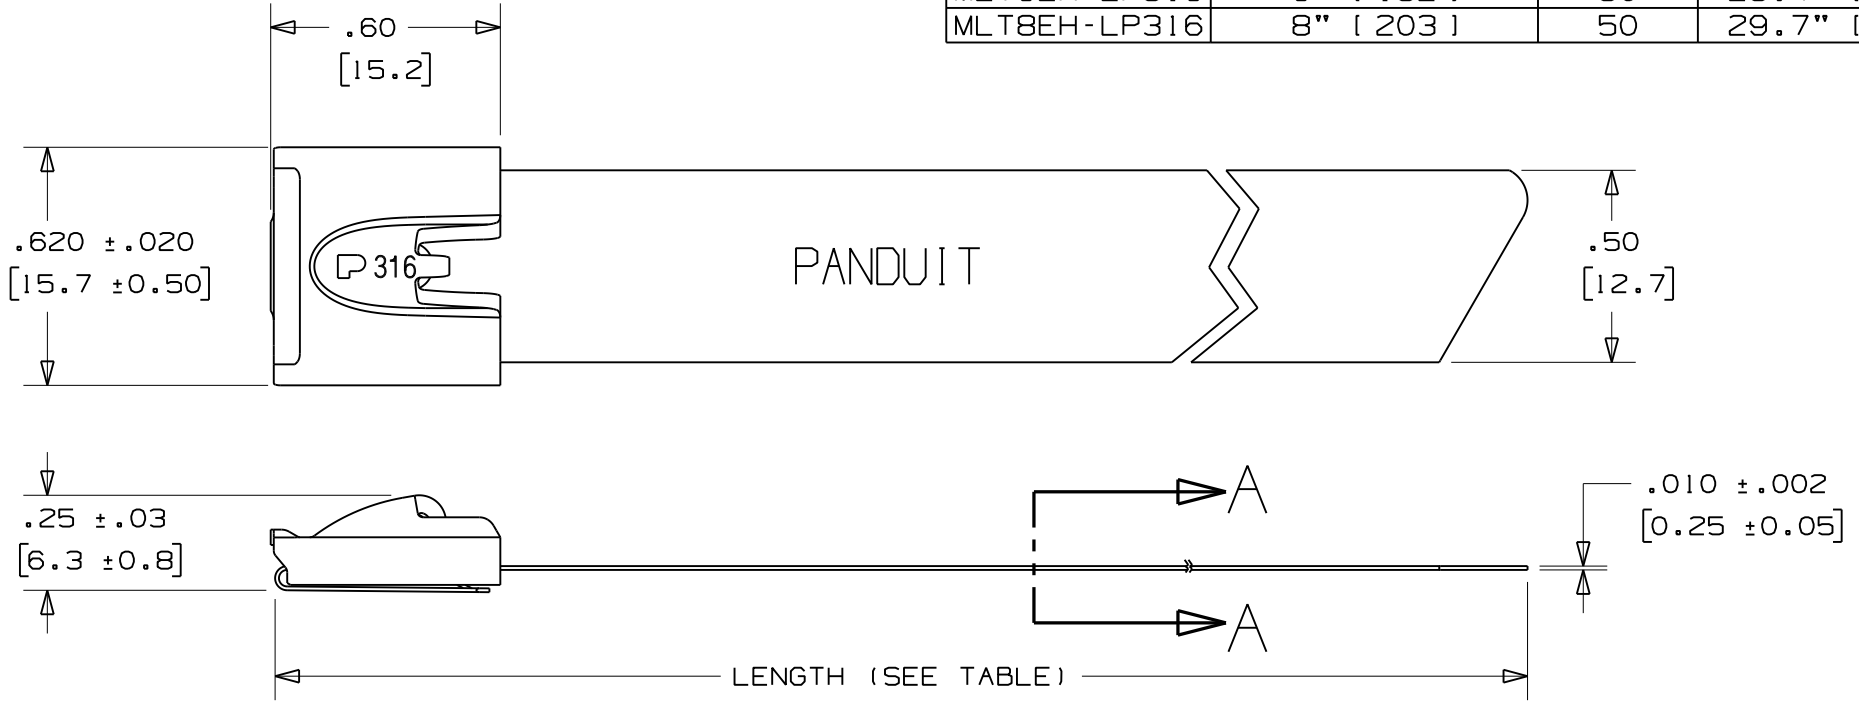


- NOTES:
1. APPLICATION TOOLS - ST3MT & RT2HT
 2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2670 NEWTONS) WHEN TESTED ON A 3" MANDREL.
 3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
 4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
 5. MATERIAL: 316 STAINLESS STEEL

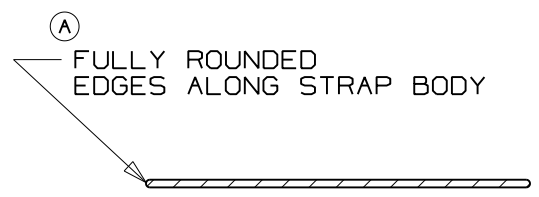

SECTION A - A
SCALE: 4x

N41156BS_DC/02A

02A	10/08	JAMB	SKB	ORIG CAD FILE SPEC WAS S41156_02 NOTE 1: APPLICATION TOOL RTIHT REPLACED BY RT2HT			 TINLEY PARK, ILLINOIS METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL - CUSTOMER DRAWING
02	9/05	JAMB	EJD	⑧ ADDED PART NO. MLT2EH-LP316 TO TABLE	SS00061	---	
01	8/04	JAMB	DPN	① REMOVED "AISI NO.1 FULL RADIUS" & REPLACED WITH "FULLY ROUNDED"	11907	CCH JJB	
00	1/04	JAMB	DPN	RELEASED	11307	CCH JJB	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM CUST	
		JAMB	DPN			SCALE 2x	DRAWING NO. N41156BS_DC