


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	12.12.24	A	INITIAL RELEASE.	JORRY DUAN
CY13-5880	13.01.09	B	CHG. TITLE	JORRY DUAN
CY13-5950	13.01.25	C	CANCEL TINNED	JORRY DUAN

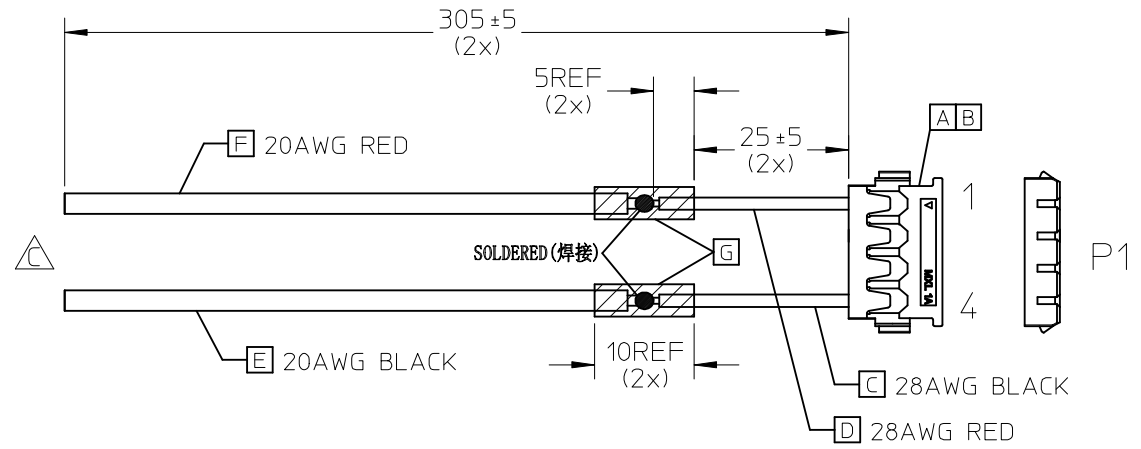

NOTES
 1. THIS PRODUCT MUST MEET EU 2002/95 EC ROHS COMPLIANCE.

此产品需符合EU 2002/95 EC ROHS 环保要求

2. ELECTRICAL PERFORMANCE REFER TO ES-000.

电气特性参考ES-000.

3. 28AWG WIRE SPEC.(线的规格)

- 1) WIRE OD:0.7+/-0.05MM,
- 2) WIRE INSULATION: FEP
- 3) CONDUCTOR:7/0.127 TINNED COPPER
- 4)UL STYLE:UL1371
- 5)TEMPERATURE RATING:105℃
- 6) RATED VOLTAGE:300V

4. 20AWG WIRE SPEC.(线的规格)

- 1) WIRE OD:1.78+/-0.05MM,
- 2) WIRE INSULATION: PVC
- 3) CONDUCTOR:26/0.16 TINNED COPPER
- 4)UL STYLE:UL1569
- 5)TEMPERATURE RATING:105℃
- 6) RATED VOLTAGE:300V

5. STICK UL LABEL ON THE OUTSIDE CARTON.

外箱上贴UL 标签

P1	COLOR
1	RED
2	
3	
4	BLACK

ITEM	DESCRIPTION	L(MM)	Q'TY
G	HST 2MM BLACK		A/R
F	20AWG;PLTD,PVC,RD;1.78mm;UL1569		A/R
E	20AWG;PLTD,PVC,BK;1.78mm;UL1569		A/R
D	28AWG;FEP;RED;OD:0.7MM;UL1371;VW-1.		A/R
C	28AWG;FEP;BLACK;OD:0.7MM;UL1371;VW-1.		A/R
B	TERMINAL 28-30AWG		2
A	4CKT HSG,WHITE		1

EC NO: CPG2013-2410 DRWN: CXIA003 CHKD: JDUAN APPR: FNIE	2013/01/26 2013/01/26 2013/01/28	DESCRIPTION QUALITY SYMBOLS $\nabla_F = 0$ $\nabla_E = 0$ $\nabla_F = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					DRAWN BY CXIA003		DATE 2012/12/25		TITLE 2PINS WIRING PICO EZMATE 12" 20/28AWG		
					CHECKED BY JDUAN		DATE 2012/12/25				
					APPROVED BY FNIE		DATE 2012/12/26				
		ANGULAR ±---°		MATERIAL NO. 688014085		DOCUMENT NO. SD-68801-087		SHEET NO. 1 OF 1			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					