


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
C		REVISED PER ECO-18-008015	24MAY2018	AP	GD

RECOMMENDED PCB LAYOUT  
 TOLERANCE IS ±0.05

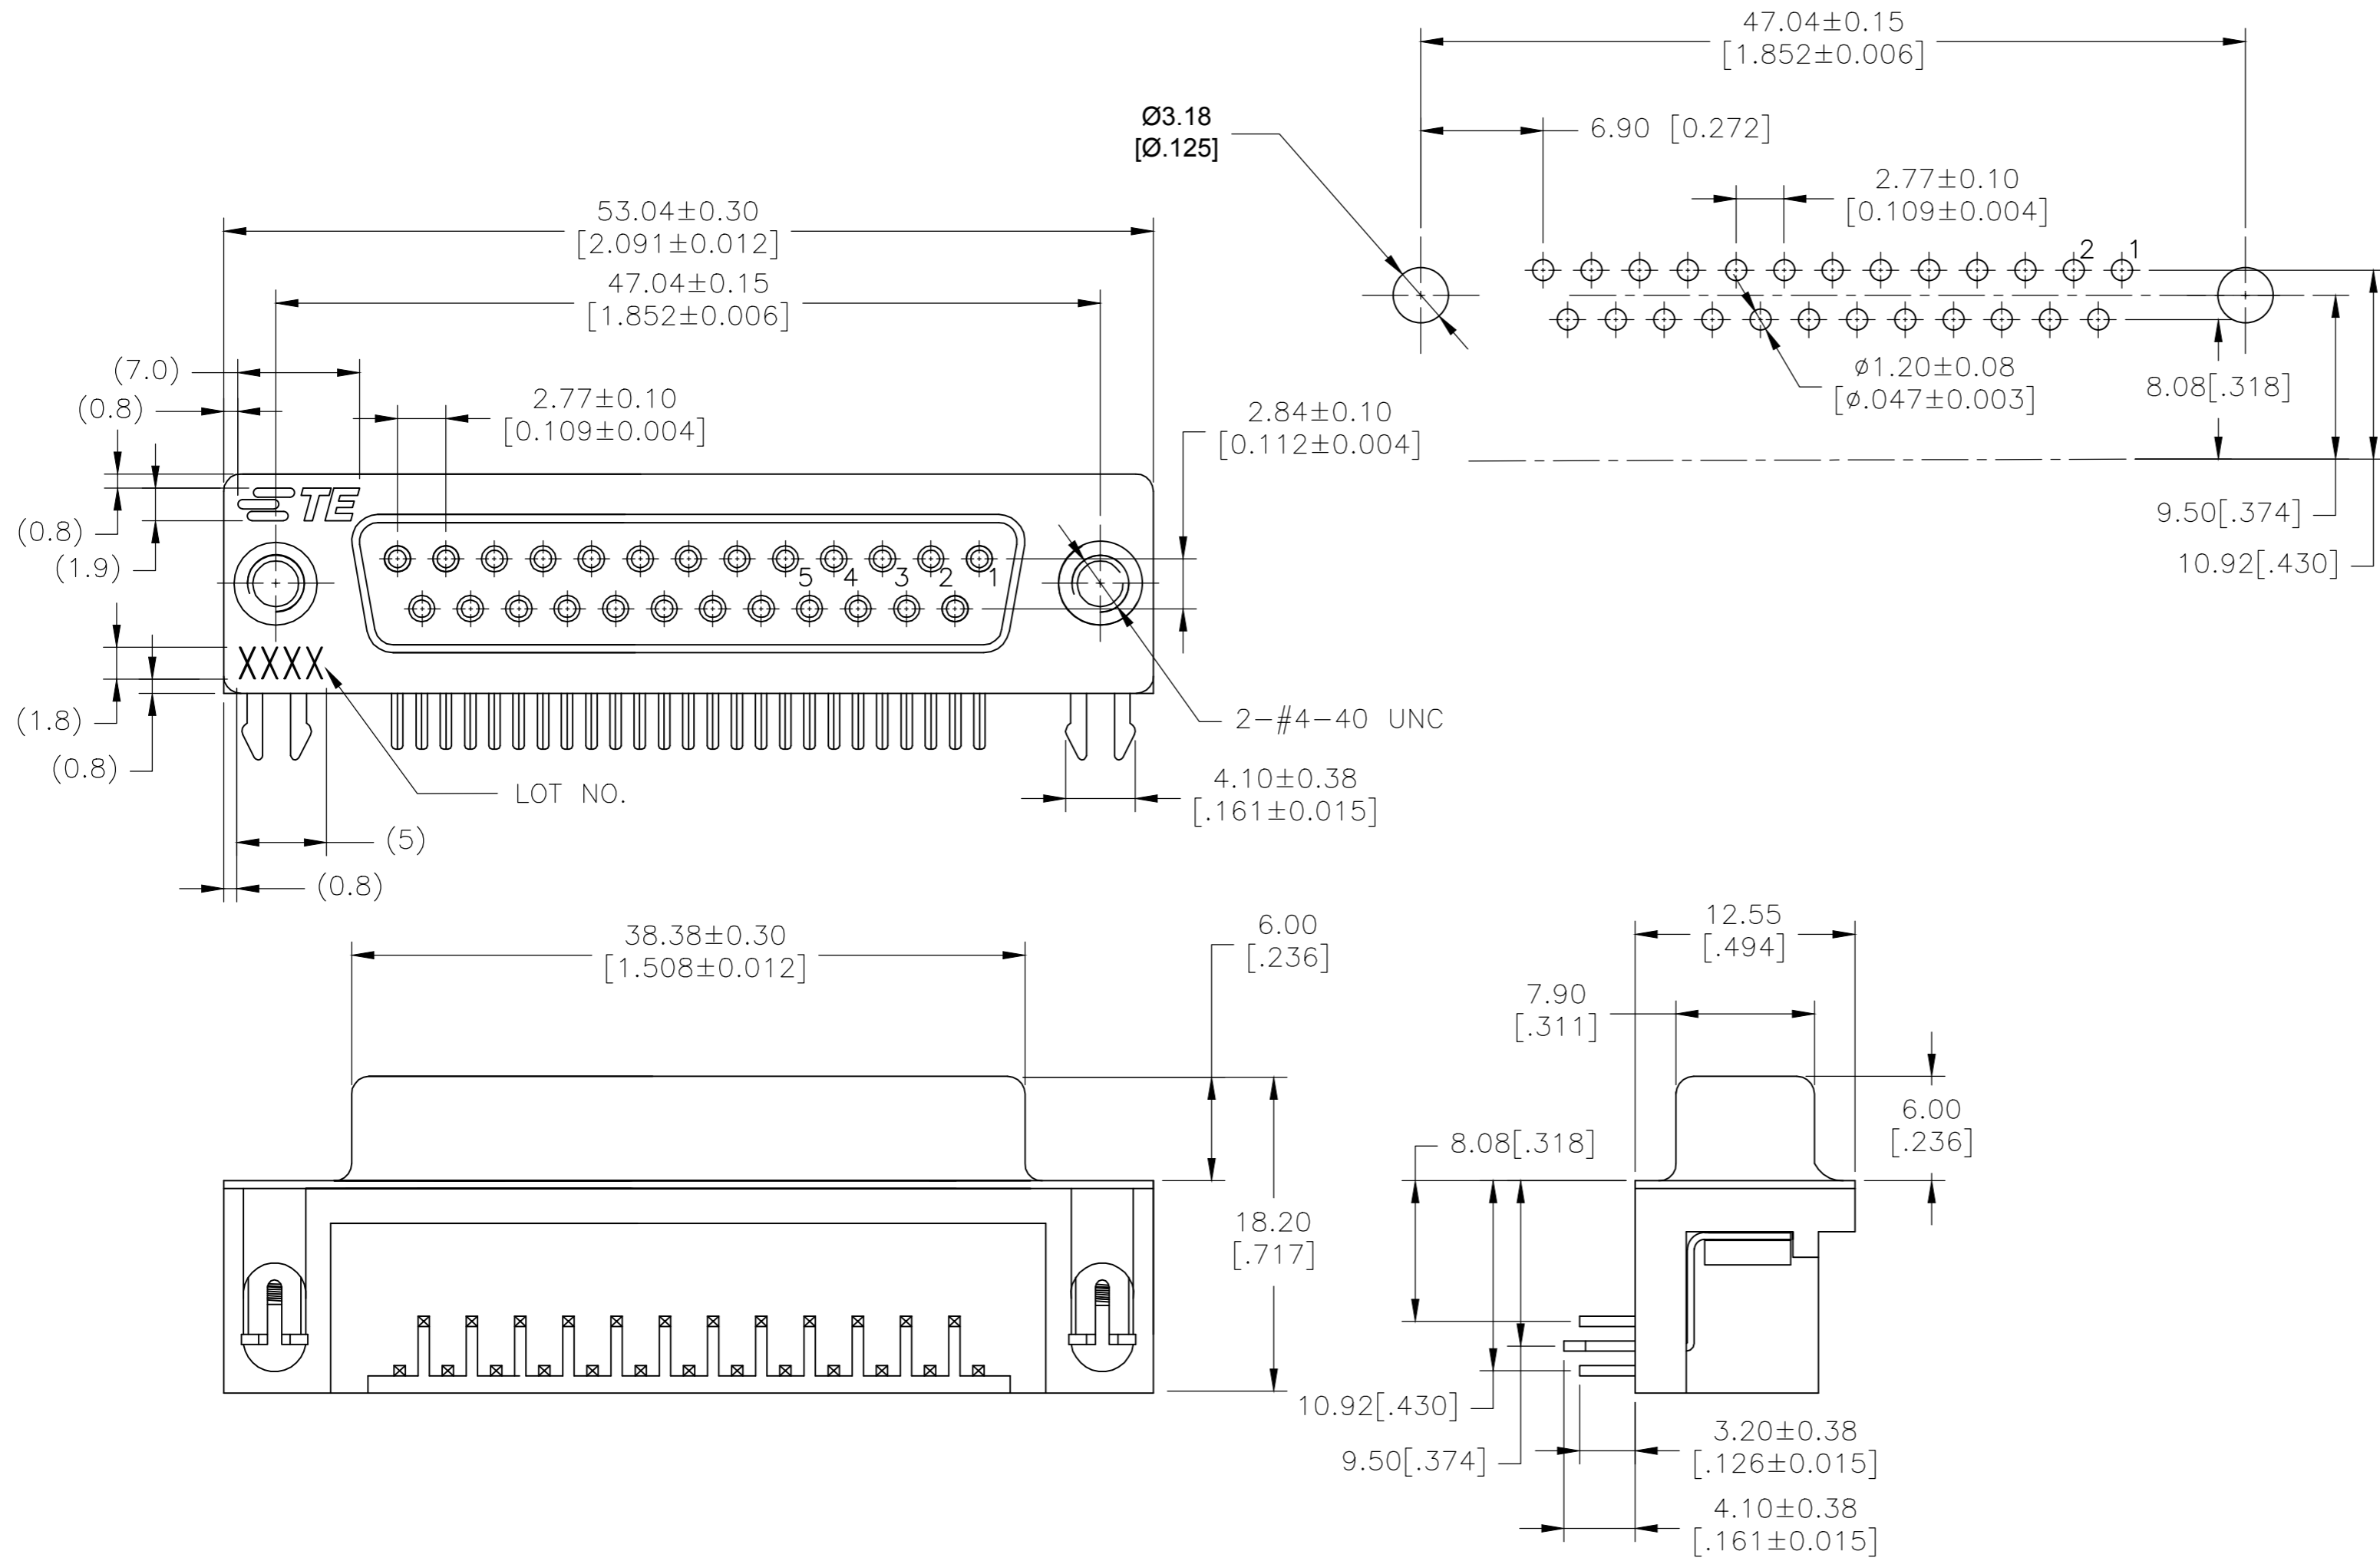

- NOTES:
- HOUSING:PBT+GF(UL94V-0) BLACK
  - CONTACT:PHOSPHOR BRONZE
  - " GOLD PLATING ON CONTACT AREA
  - 100u" MATTE TIN PLATING ON SOLDER TAIL
  - 50u" NICKEL UNDERPLATED OVERALL
  - HOLDDOWN:BRASS,100u" TIN OVER 50u" NICKEL
  - SHELL:SPCC,NICKEL PLATING OVERALL
  - RIVETLOCK:BRASS,NICKEL PLATING OVERALL

LOT NUMBER "XXXX"  
 STANDS FOR CALENDAR YEAR  
 STANDS FOR WEEK NUMBER

THREADED	Au Flash	2311762-1
TYPE	Contact Area Plating	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 21FEB2017	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK GORENC, DANIEL L. 21FEB2017	NAME AMPLIMITE RECEPTACLE, HD20, RIGHT ANGLE, 25P THREADED	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GORENC, DANIEL L. 21FEB2017	PRODUCT SPEC 108-130023	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± 0.40		SIZE A2		
2 PLC ± 0.25		CAGE CODE 00779		
3 PLC ± 0.15		DRAWING NO. C=2311762		
4 PLC ± -		RESTRICTED TO		
ANGLES ± 3°		SCALE 1:1		
MATERIAL		SHEET 1 OF 1		
FINISH		REV C		
WEIGHT		CUSTOMER DRAWING		