


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE IN CAD	2/7/03

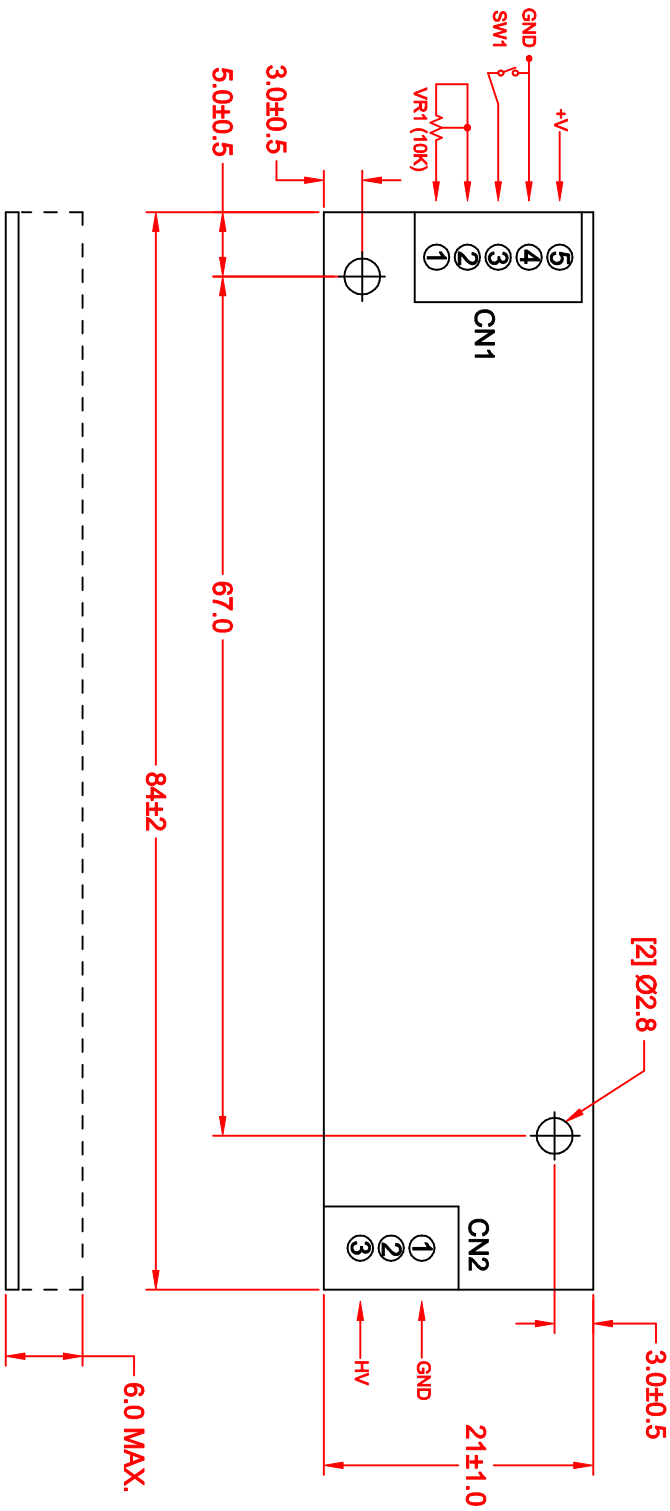

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	VR1 POTENTIOMETER (10K)
	2	VR1
	3	SW1 INHIBIT (+V OR OPEN = OFF/GND = ON)
	4	INPUT (GND)
	5	INPUT (+12V)
CN2	1	OUTPUT (HV)
	2	---
	3	---
	4	---
	5	OUTPUT (GND)

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	8.0	12.0	16.0
INPUT CURRENT: (mA)	200	230	260
OUTPUT VOLTAGE: (Vrms)	900	1000	---
OUTPUT CURRENT: 2 X (mA)	5.5	6.0	7.0
OUTPUT FREQUENCY: (KHz)	27	37	47
DIMMING RANGE (%)	40	---	100
OPERATING TEMP: (CELSIUS)	0	25	60

METRIC	DIMENSIONS ARE IN MILLIMETERS
	TOLERANCE UNLESS OTHERWISE SPECIFIED
	1 PL +/- 0.3
	2 PL +/- 0
	ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE: DIMMING CCFL INVERTER

DRAWN BY: L. WENGSTROM	APP'D BY: F.D.	DATE: 2/7/03	SIZE: A	FSCH NO.: 55335	DRAWING NO.: BXA-12564-6M	RELEASED DATE: 2/7/03	REVISION DATE:	REV. NO.:	SHEET OF:
- CAD DRAWING -									
MANUAL REVISIONS NOT PERMITTED									

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10546 AND BXC-10643 CAN BE ORDERED SEPARATELY.