

NOTES:


1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 500 MHz
- 1.2 VSWR (MAX.): 1.25:1
- 1.3 IMPEDANCE: 50 OHMS
- 1.4 MAXIMUM INPUT POWER:  
2 WATTS AVERAGE AT +25°C DERATED  
LINEARLY TO 0.5 WATTS AT +125°C.
- 1.5 OPERATING TEMPERATURE RANGE:  
-55°C to +125°C

△ EPOXY SEAL UNIT AS SHOWN PER  
EPX-08000-44-01.

3.0 MARKING: MARK UNIT AS SHOWN.  
(REF: INK-03264-27-05)

4.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

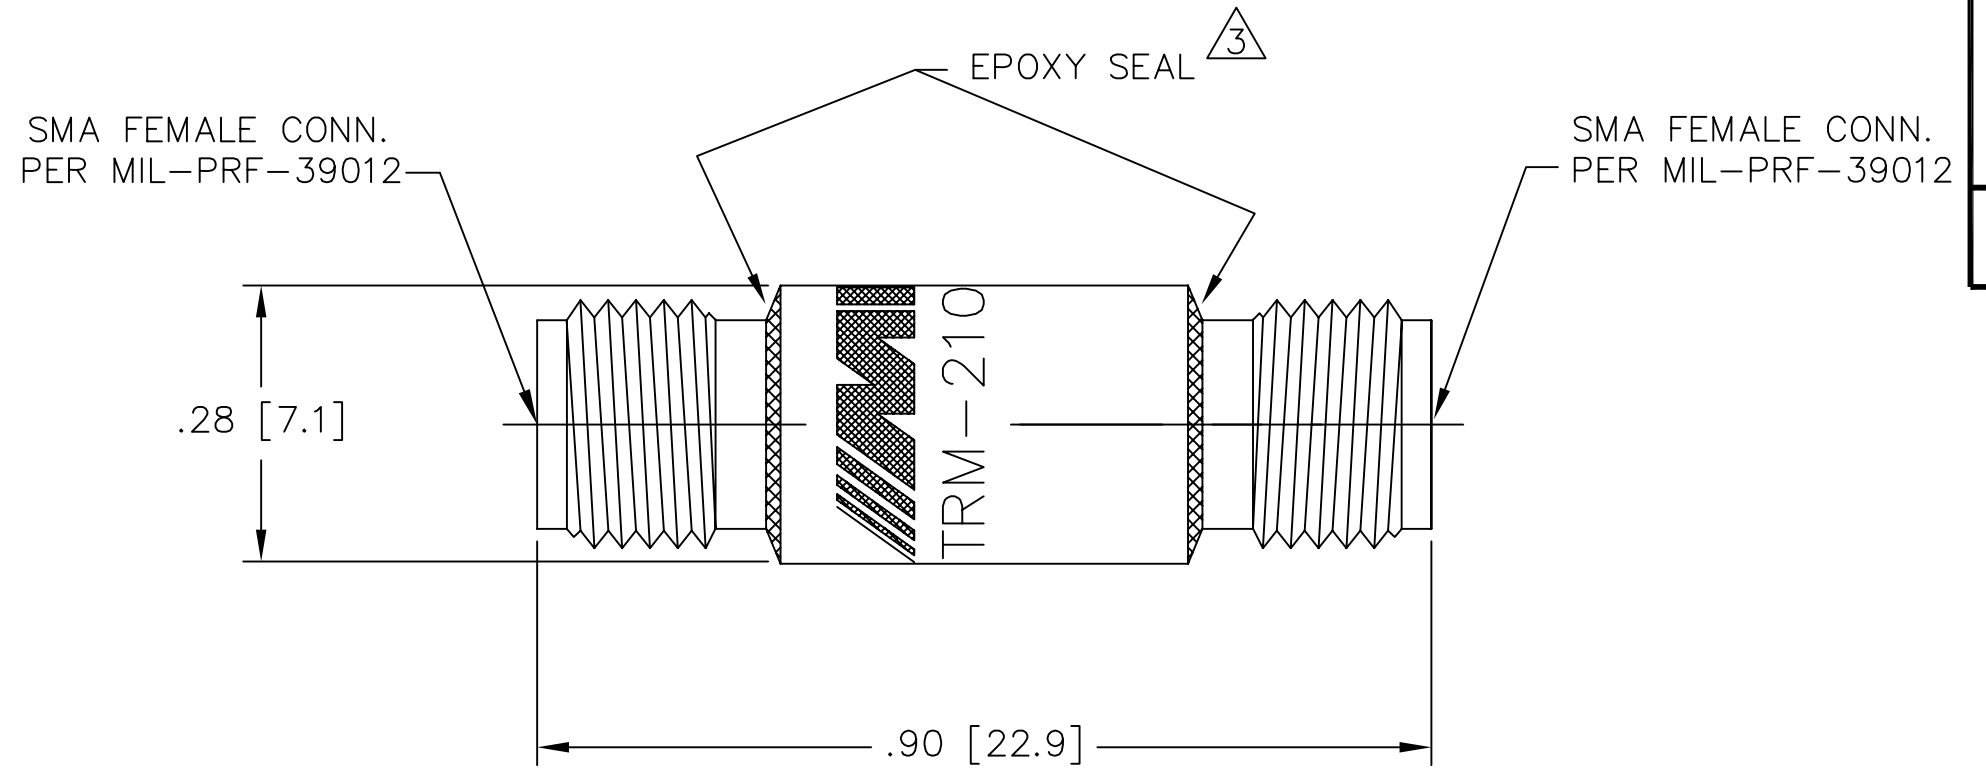

MODEL NUMBER  
TRM-2106-FF-SMA-02  
REV.  
-

REV.	DESCRIPTION	DATE
-	RELEASED	12/2/02

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
	DRAWN/DATE S.ORLOV 11/26/02	ENG./DATE G.KOZAK 11/27/02	DRAWING NUMBER TRM-2106-FF-SMA-02	
	CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1