


## Contact insert module - HC-M-02-AT-F-16 - 1417296

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert module, Number of positions: 2, Socket, Axial screw connection, 1000 V, 70 A, 6 mm<sup>2</sup> ... 25 mm<sup>2</sup>, Application: Power

### Key Commercial Data

Packing unit	2 STK
Minimum order quantity	2 STK
GTIN	 4 055626 111490
GTIN	4055626111490

### Technical data

#### Dimensions

Height	46.5 mm
Width	34.2 mm
Length	14.6 mm

#### Electrical characteristics

Note	For HEAVYCON HC-B6 to B48 housing, HC-M-MHR... hinged retaining frame required, axial connection for 2.5 mm Allen key
Rated voltage (III/3)	1000 V
Rated current	70 A
Rated surge voltage	8 kV
Connection profile	2

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

#### Mechanical characteristics

Conductor cross section	6 mm <sup>2</sup> ... 25 mm <sup>2</sup> (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	8 ... 6

# Contact insert module - HC-M-02-AT-F-16 - 1417296

## Technical data

### Mechanical characteristics

Stripping length of the individual wire	11 mm +1 (6 mm <sup>2</sup> ... 16 mm <sup>2</sup> )
	12.5 mm +1 (25 mm <sup>2</sup> )
Tightening torque	2 Nm (6 mm <sup>2</sup> )
	3 Nm (10 mm <sup>2</sup> ... 25 mm <sup>2</sup> )
Wire diameter including insulation	8.9 mm
Hexagonal socket	SW2,5
Insertion/withdrawal cycles	≥ 500
Minimum housing height	72 mm

### General

Series	HC-M-02
Color	light gray
Number of module slots	1
Connection method	Axial screw connection
Connection in acc. with standard	IEC / EN
Flammability rating according to UL 94	V0
Degree of pollution	3
Overvoltage category	III
Assembly instructions	Use 2.5 mm Allen wrenches for axial connection. Only for stranded wires. For housing heights $h \geq 52$ mm. Plug-in connections may only be operated only when there is no load/voltage.
Connection	<p>Note regarding axial connection technology:                      Only for stranded wires. The specified conductor cross sections refer to the geometric cross section of the cable used.                      Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use.                      The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use.                      Assembly instructions                      Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque.</p>

### Material data

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

### Standards and Regulations

Connection in acc. with standard	IEC / EN
----------------------------------	----------

# Contact insert module - HC-M-02-AT-F-16 - 1417296


## Technical data

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

## Drawings

Schematic diagram




Dimensional drawing

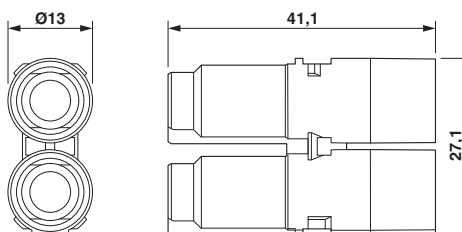


Connector pin assignment, connection side

Socket module

Diagram

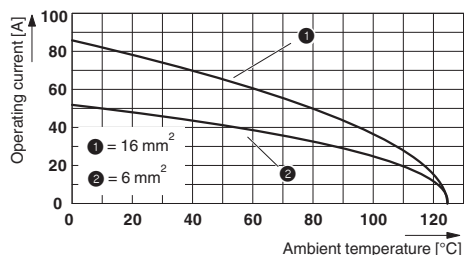

Schematic diagram

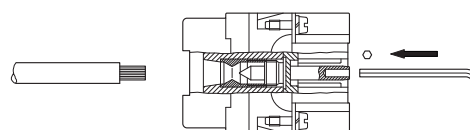

Axial screw connection

Derating diagram (6 modules in HC-B 24 housing)

## Approvals

### Approvals

Approvals

EAC / CSA / UL Recognized


Ex Approvals


### Approval details

EAC		7500651.22.01.00246
-----	--	---------------------

# Contact insert module - HC-M-02-AT-F-16 - 1417296

## Approvals

CSA		<a href="http://www.csagroup.org/services/testing-and-certification/certified-product-listing/">http://www.csagroup.org/services/testing-and-certification/certified-product-listing/</a>	13631
mm <sup>2</sup> /AWG/kcmil		6	
Nominal current I <sub>N</sub>		54 A	
Nominal voltage U <sub>N</sub>		600 V	

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E118976
mm <sup>2</sup> /AWG/kcmil		6	
Nominal current I <sub>N</sub>		69 A	
Nominal voltage U <sub>N</sub>		600 V	

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>