

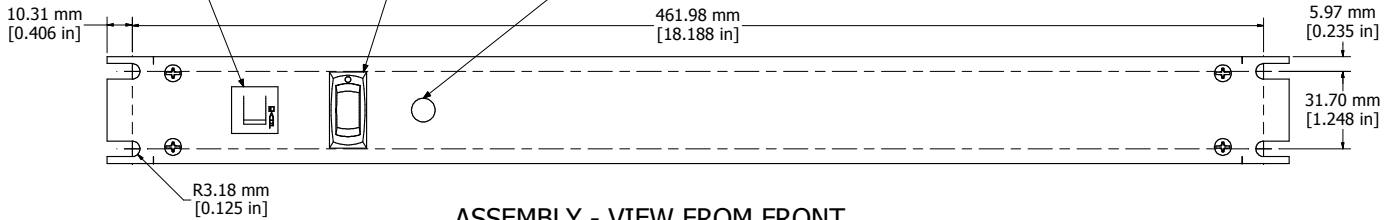



RESETTABLE CIRCUIT BREAKER LIGHTED ON/OFF POWER SWITCH SURGE INDICATOR LIGHT

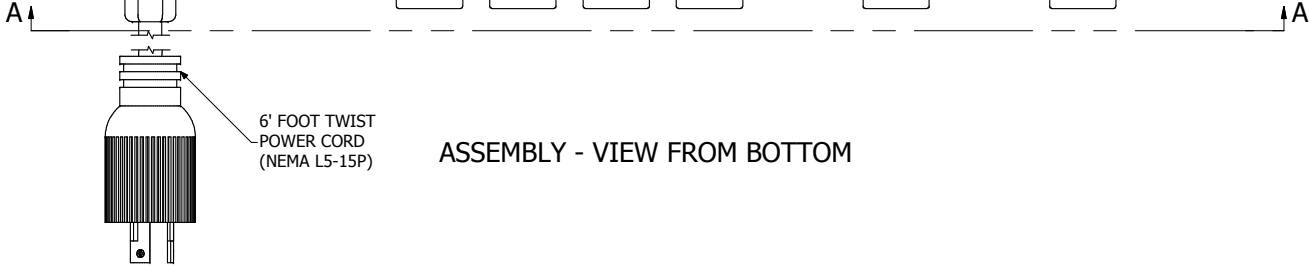


ASSEMBLY - VIEW FROM FRONT

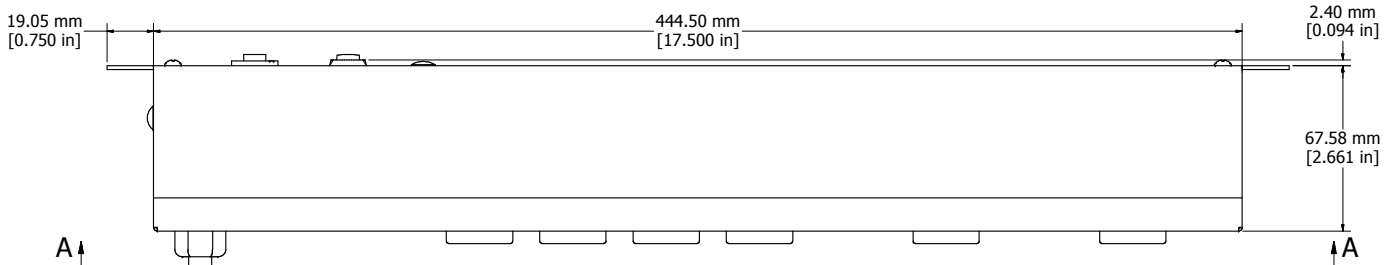


ASSEMBLY - VIEW FROM BOTTOM

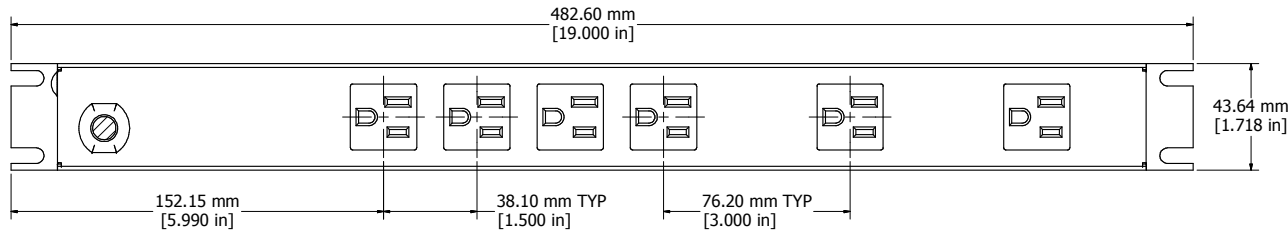

SECTION A-A

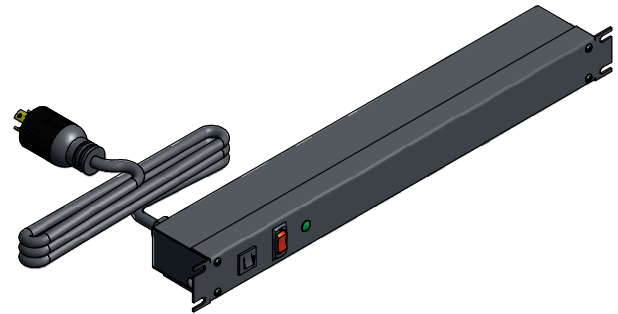

ISOMETRIC VIEW

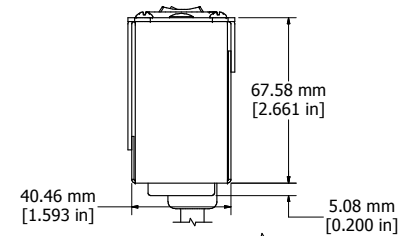

ASSEMBLY - VIEW FROM SIDE

1583H6**S**	
Finish - Front - Black Painted Steel	
Back - Black Painted Steel	
Rated - 125 VAC, 60 Hz, 15 Amps	
Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99)	
- CSA No. 8-M1986	
Surge Specs - 780 Joules, 54000 Amps Transient Current	
- Protection in 3 AC Modes (L-N, N-G, L-G)	
Colours & Cord Length	
1583H6C1SBK - Black w/ 6' Foot Power Cord (NEMA 5-15P)	
1583H6C1S- ASA 61 Grey w/ 6' Foot Power Cord (NEMA 5-15P)	
1583H6D1SBK - Black w/ 15' Foot Power Cord (NEMA 5-15P)	
1583H6D1S- ASA 61 Grey w/ 15' Foot Power Cord (NEMA 5-15P)	

