

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

LOC FT DIST 0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECO-11-005027	16MAR2011	RK	HMR

- CONDUCTOR  
NOMINAL STRANDING: 65/0100  
NOMINAL DIAMETER: .095
- JACKET CONSTRUCTION  
OUTSIDE DIAMETER: .190±.005  
COLOR: BLACK
- MARKING  
TE CONNECTIVITY 12 AWG (3.31mm<sup>2</sup>) XHHW-2 OR XHH OR RHW-2 OR RHH SR OR USE-2 SUNLIGHT RESISTANT (UL) 600V VWI UL LISTED,
- △ PART COMES IN 30" DRUM.
- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).

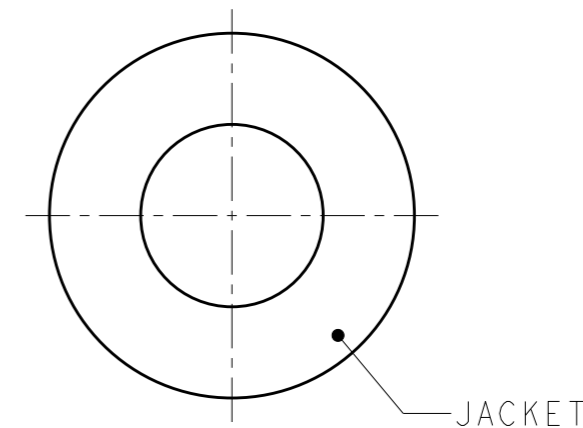

1500 FT REEL	1986165-3
500 FT REEL	1986165-2
△ 6000 FT REEL	1986165-1
CABLE LENGTH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 03APR2007	<b>STE</b> TE Connectivity													
DIMENSIONS: INCHES		CHK M. STRECKEWALD 03APR2007														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. STRECKEWALD 03APR2007	NAME SOLAR CABLE, UL-LISTED, 12 AWG													
<table border="0"> <tr> <td>0 PLC</td> <td>±-</td> </tr> <tr> <td>1 PLC</td> <td>±.1</td> </tr> <tr> <td>2 PLC</td> <td>±.02</td> </tr> <tr> <td>3 PLC</td> <td>±.005</td> </tr> <tr> <td>4 PLC</td> <td>±.0005</td> </tr> <tr> <td>ANGLES</td> <td>±-</td> </tr> </table>		0 PLC	±-	1 PLC	±.1	2 PLC	±.02	3 PLC	±.005	4 PLC	±.0005	ANGLES	±-	PRODUCT SPEC	-	
0 PLC	±-															
1 PLC	±.1															
2 PLC	±.02															
3 PLC	±.005															
4 PLC	±.0005															
ANGLES	±-															
MATERIAL -		APPLICATION SPEC	-													
FINISH -		WEIGHT -	SIZE A3	CAGE CODE 00779												
		CUSTOMER DRAWING	DRAWING NO C-1986165	RESTRICTED TO -												
		SCALE 10:1	SHEET 1	OF 1												
			REV C3													