



## GA10K3A1i SERIES II THERMISTORS

Thermally Conductive Epoxy Coating

Ø 2.4 mm Maximum Diameter

30 AWG Solid Silver-Plated Copper Leads  
with White PTFE Insulation

Four Temperature Tolerance Classifications Available

RoHS Compliant

BetaCURVE series II thermistors are small epoxy coated devices with solid tin-plated lead wires. The series II offers insulated lead wires for added protection, the PTFE insulation also enhances bonding for applications that require mounting or potting the thermistor with epoxies or adhesives. This series also offers a choice of precision temperature tolerance classifications for a wide variety of applications.


### FEATURES

- Interchangeability
- Proven stability and reliability
- Rapid time response
- PTFE insulated lead wires
- Thermally conductive epoxy coating
- Temperature range -40°C to +125°C
- Custom probe assemblies available

### APPLICATIONS

- Temperature sensing, control and compensation
- Tight tolerance instrumentation
- General instrumentation applications

**MECHANICAL DETAILS**

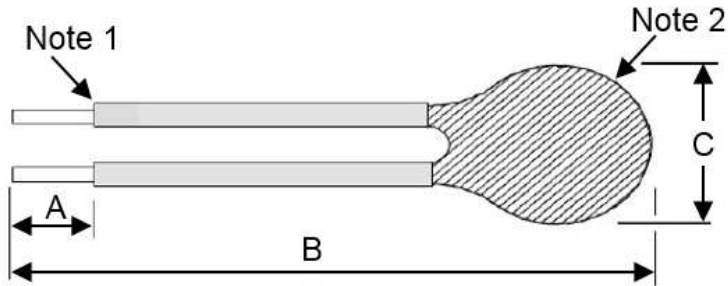

**DIMENSIONS**

A	B	C
10 ±2 mm	76 ±2 mm	2.4 mm max.

**Note 1:** 30AWG Solid Silver-Plated Copper Leads with White PTFE Insulation

**Note 2:** Yellow Stycast 2850ft Epoxy

**PERFORMANCE SPECS**

Parameters	Units	Value
Nominal Resistance at +25°C	Ohms	10,000
GA10K3A1iA Resistance Tolerance from 0°C to +70°C	°C	±0.1
GA10K3A1iB Resistance Tolerance from 0°C to +70°C	°C	±0.2
GA10K3A1iC Resistance Tolerance from 0°C to +70°C	°C	±0.5
GA10K3A1iD Resistance Tolerance from 0°C to +70°C	°C	±1.0
Alpha Value at +25°C	%/°C	4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	±0.5
Time Response in Liquids	Seconds	<1
Dissipation Constant in Still Air	mW/°C	0.85

**RESISTANCE V TEMPERATURE TABLE**

Temp. °C	Ohms
-40	336098
-39	314553
-38	294524
-37	275897
-36	258563
-35	242427
-34	227398
-33	213394
-32	200339
-31	188163
-30	176803
-29	166198
-28	156294
-27	147042
-26	138393
-25	130306
-24	122741
-23	115661
-22	109032
-21	102824
-20	97006
-19	91553
-18	86439
-17	81641
-16	77138
-15	72911
-14	68940
-13	65209
-12	61703
-11	58405
-10	55304
-9	52385
-8	49638
-7	47050
-6	44613
-5	42317
-4	40151
-3	38110
-2	36184
-1	34366
0	32651
1	31031

Temp. °C	Ohms
2	29500
3	28054
4	26687
5	25395
6	24172
7	23016
8	21921
9	20885
10	19903
11	18973
12	18092
13	17257
14	16465
15	15714
16	15001
17	14324
18	13682
19	13073
20	12493
21	11943
22	11420
23	10923
24	10450
25	<b>10000</b>
26	9572
27	9165
28	8777
29	8408
30	8056
31	7721
32	7402
33	7097
34	6807
35	6530
36	6266
37	6014
38	5774
39	5544
40	5325
41	5116
42	4916
43	4724

Temp. °C	Ohms
44	4542
45	4367
46	4200
47	4040
48	3887
49	3741
50	3601
51	3467
52	3339
53	3216
54	3098
55	2985
56	2877
57	2773
58	2674
59	2579
60	2487
61	2399
62	2315
63	2234
64	2157
65	2082
66	2011
67	1942
68	1876
69	1813
70	1752
71	1693
72	1637
73	1582
74	1530
75	1480
76	1432
77	1385
78	1341
79	1298
80	1256
81	1216
82	1178
83	1141
84	1105
85	1070

Temp. °C	Ohms
86	1037
87	1005
88	974
89	945
90	916
91	888
92	862
93	836
94	811
95	787
96	764
97	741
98	720
99	699
100	678
101	659
102	640
103	622
104	604
105	587
106	571
107	555
108	539
109	524
110	510
111	496
112	482
113	469
114	457
115	444
116	432
117	421
118	410
119	399
120	388
121	378
122	368
123	359
124	350
125	341

## ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ*
GA10K3A1iA	Series II thermistor	10,000	1,000
GA10K3A1iB	Series II thermistor	10,000	1,000
GA10K3A1iC	Series II thermistor	10,000	1,000
GA10K3A1iD	Series II thermistor	10,000	1,000

\* For quantities less than MOQ (Minimum Order Quantity) contact Distribution

**NORTH AMERICA**  
Tel +1 800 522 6752  
[customercare.ando@te.com](mailto:customercare.ando@te.com)

**EUROPE**  
Tel +31 73 624 6999  
[customercare.glw@te.com](mailto:customercare.glw@te.com)

**ASIA**  
Tel +86 0400 820 6015  
[customercare.chdu@te.com](mailto:customercare.chdu@te.com)

### [te.com/sensorsolutions](http://te.com/sensorsolutions)

BetaCurve, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.