


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
4. NO CONTACTS ON POS. A1 + A2
5. P.C.B. HOLE DRILLINGS SEE SHEET 2
6. CONNECTOR IS PART MARKED: 3027W2SAR99A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance	dim. in mm	scale:	2:1 (5:1)		
					date		name	material:	SEE NOTES	
					drawn	02.05.14	Henneboel	title: D-SUB COMBINATION FEMALE 27W2S		
					appd.	02.05.14	Schmidt			
					norm				dwg no:	DIN-A3
					d-old				13K1A4667	sh: 1/2
					a	Original			part no: 3027W2SAR99A10X	
rev.	description	date	name							

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

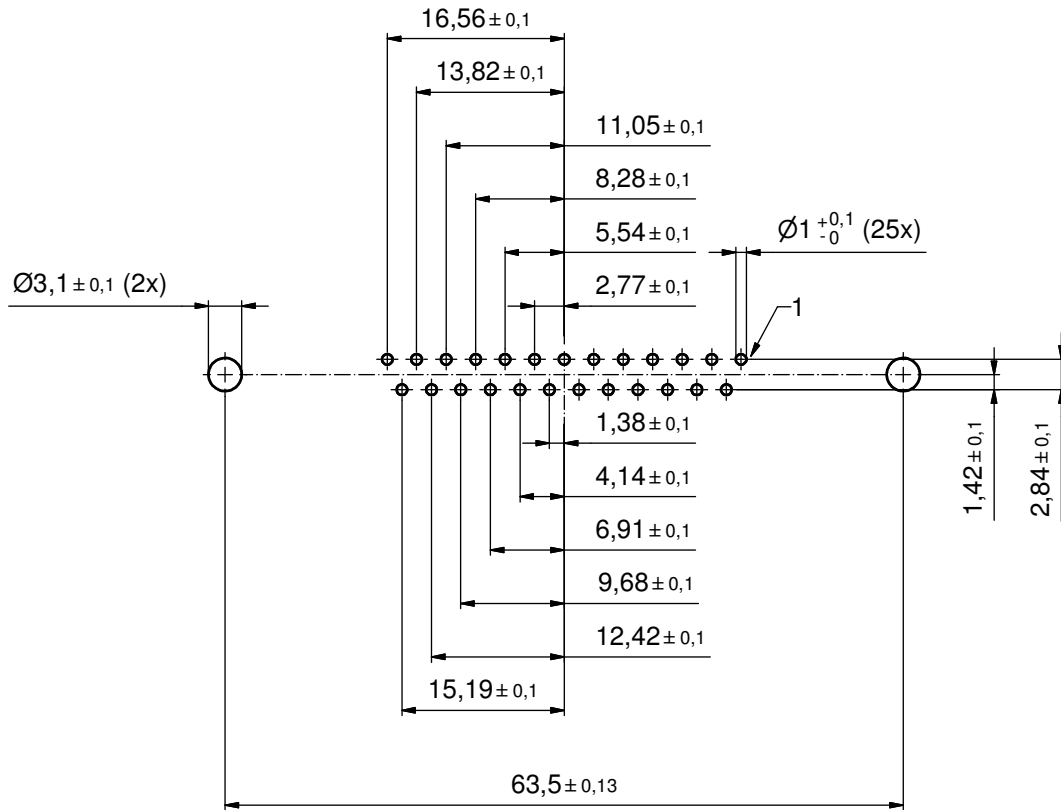

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 2:1
				dim. in mm		material: SEE SHEET 1
	drawn	date	name	title:		
	appd.	02.05.14	Henneboel	P.C.B. HOLE DRILLINGS		
	norm		Schmidt	D-SUB COMBINATION FEMALE 27W2S		
	d-old			dwg no:		
	a	Original		13K1A4667		
rev.	description	date	name			DIN-A3
			part no: SEE SHEET 1			sh: 2/2