


PCB layout, component side

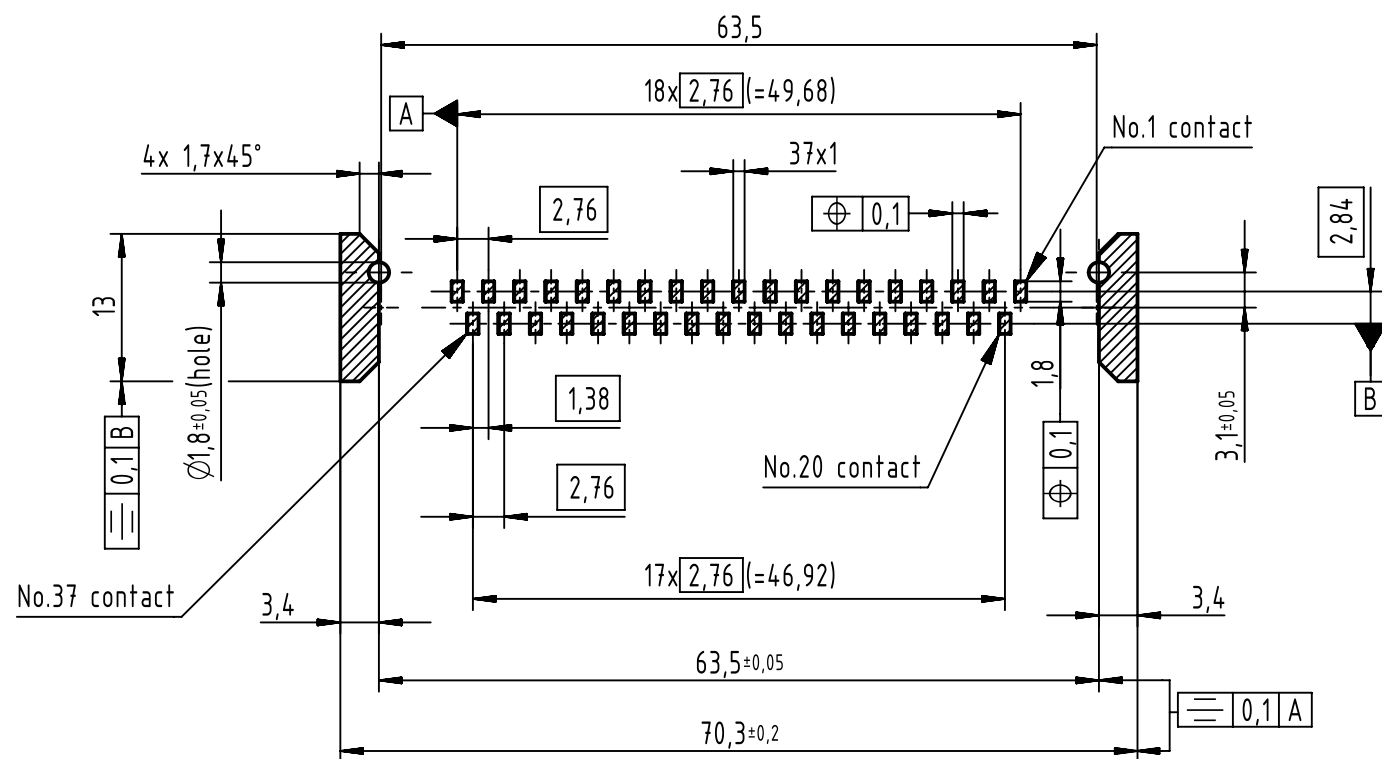

Max. Temperature: 260° during 10 seconds.  
Find further technical information on DS 09550200302

0955 415 3611 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 415 3612 741	1	4-40 UNC		
0955 415 6611 741	2	M3		
0955 415 6612 741	2	4-40 UNC		
0955 415 7611 741	3	M3		
0955 415 7612 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

	All Dimensions in mm Original Size DIN A3		Scale 1:1	Free size tol.	Ref. Sub.	
	All rights reserved Department EC PD - CN		Created by ZHUANGJ	Inspected by LUOK	Standardisation HOFFMANN	Date 2015-03-03
HARTING Electronics GmbH D-32339 Espelkamp		Title D-Sub str SMT 37-pole fem ass with nut and ground pad			Doc-Key / ECM-Nr. 100236633/UGD/001/B 50000084919	
		Type TB	Number 0955415X61X		Rev. B	Page 1/1