CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

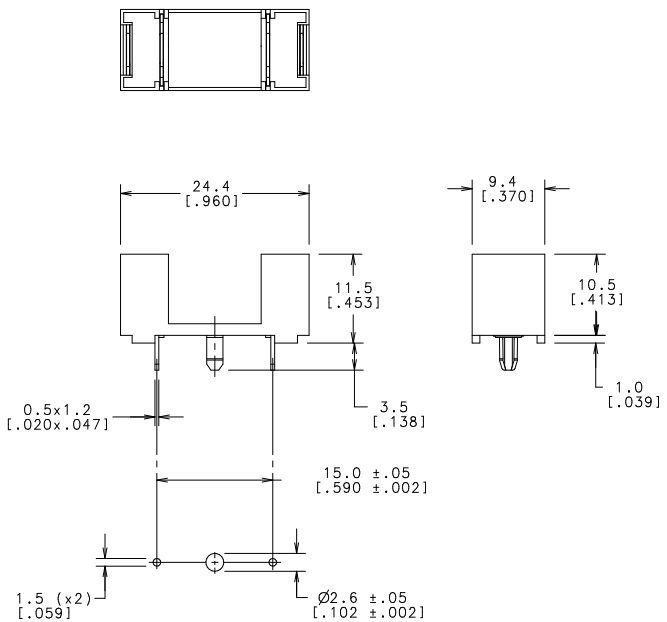

P.C. BOARD DETAIL

SPECIFICATIONS:

INSULATING BODY: PA 68 UL 94 VO (BLACK)

CONTACTS: CuZn37 + Ni + Sn

NOMINAL CURRENT: 6.3A

RATED VOLTAGE: 250V

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

CC	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS.-MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS.-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

BILL OF MATERIAL

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

LTR	REVISION	CHK	APD
A	61567 - RELEASED 12/8/04 BJJ		

COPIES TO

1	9	18					
2	10	19					
3	12	20					
4	13	21					
5	14	23					
6	15	33					
7	16	43					
8	17	53					

MATL SPEC

FINISH

		DATE	SCALE
DRW	BJJ	12/08/04	2:1
CHK		DATE	SUPER DRW
APPD		DATE	FINISH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.25[.01] FRACTION ±
THREE PLACE DEC ±.100[.0041] ANGULAR ±1°

3RD ANGLE PROJECTION

TITLE

FUSEHOLDER OPEN 5x20 BLACK

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION A

DRWG. NO. OPTF0075PXBL

FINAL

UNCONTROLLED DOCUMENT