



UNIT:mm

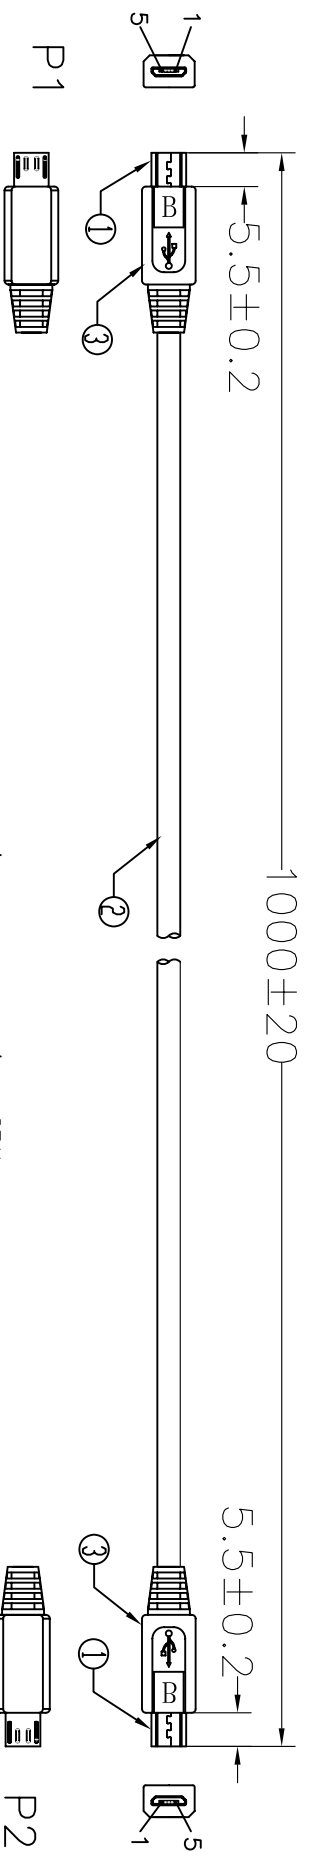

PIN ASSIGNMENT	
P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 DRAIN+BRAID	5
SHELL	SHELL

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

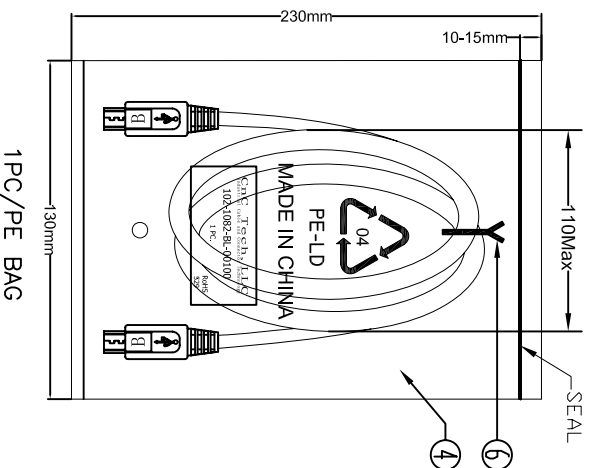

NO.	TIE	Q'TY	NAME	SPECIFICATION
⑥	TIE	1	BLACK	L=80mm
⑤	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm	PRINT BLACK*MADE IN CHINA*+“10PCS”及印生产周期,有透气孔.
④	PE BAG	1	CLEAR SIZE: 130*230*0.05mm	PRINT BLACK*MADE IN CHINA*+“1PC”及印生产周期,有透气孔.
③	OUT JACKET	12g	BLACK PVC-40P	(MOULD NO:MM-116)
②	CABLE	1	USB2.0 UL2725	[28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=990+10/-0mm
①	CONN	2	MICRO USB 5P B/M	SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1082-DL-00100
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

A

B

C

D

A

B

C

D