



No. of Contacts	DIMENSIONS	
	A	B
6	4.00	6.00
8	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00

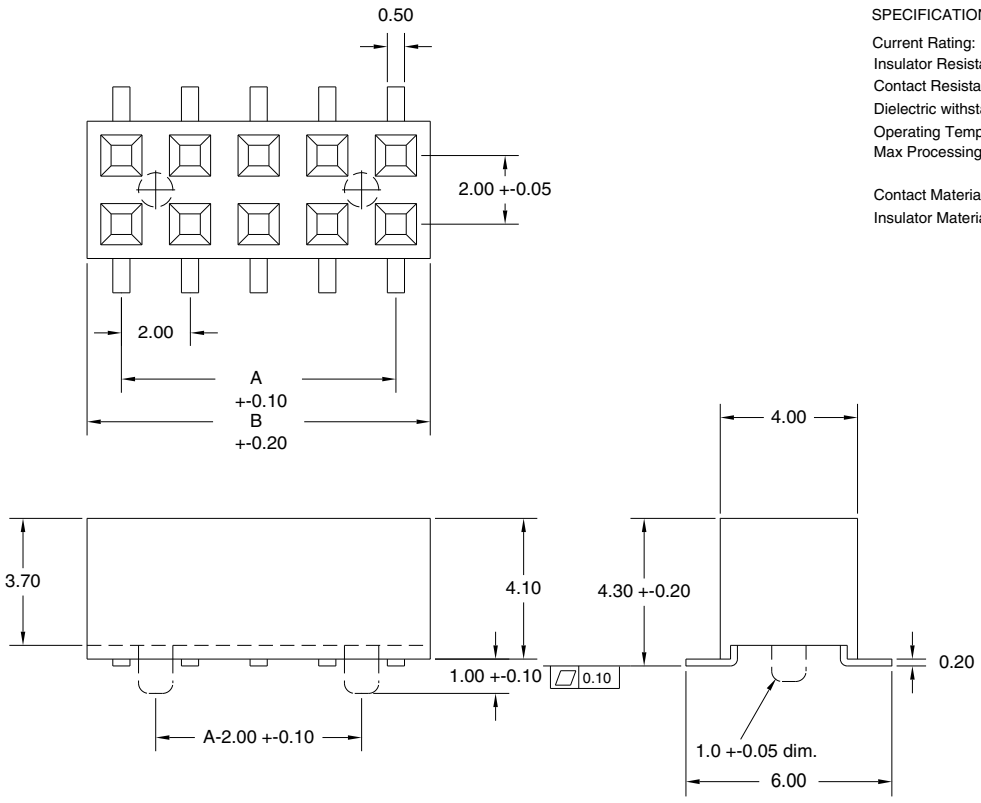

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Contact Resistance: 20 milli Ohm Max.
 Dielectric withstanding: 500 VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Max Processing Temp: 230 Degrees C. for 30-60 seconds (260 Degrees C. for 10 seconds)

Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon 6T

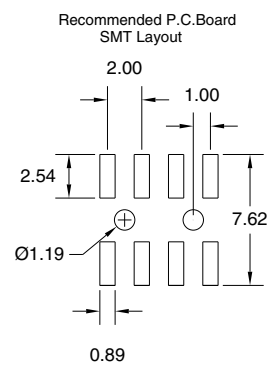

SULLINS
 801 E. Mission Rd.
 San Marcos, CA 92069

GENERAL TOLERANCE		SCALE	DRAWN	DATE	DWG. NO.	T0022	REV.
XX. +	XXX. +	6:1	CHECK	DATE	PARTS NO.		
X. + 0.20	.XXX +	UNIT	APPROVE	DATE	PPPNxx2FFKS (w/o locating peg)		SHEET
.X + 0.10		MM			PPPNxx2FFKP (w locating peg)		
.XX + 0.05		SIZE					
		A4					