

## SUMMARY

### # Wires

Low	2
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	00
Termination type	Male solder
IP rating	50
Cable Ø	2.80 - 3.50 mm
Matching parts	EGG.00.302.CLL
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FG*: Straight plug, cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	D35: 2.8 - 3.5 mm
Variant	Z : Nut for fitting a bend relief

### Performance

Configuration	0.302 : 2 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	5 Amps

### Specifications

Contact Type:	Solder
Max. Matings:	5000
Contact Dia.:	0.5 mm (0.02in)
Bucket Dia.:	0.4 mm (0.016in)
Max. Solid Conductor:	0.09 mm <sup>2</sup> (AWG 28)
Max. Stranded Conductor:	0.05 mm <sup>2</sup> (AWG 30)


R (max): 8.7 mOhm  
 Vtest (contact-shell): 950 V (AC), 1340 V (DC)  
 Vtest (contact-contact): 1000 V (AC), 1400 V (DC)

## Others

IP Rating: 50

# DRAWINGS

## Draws

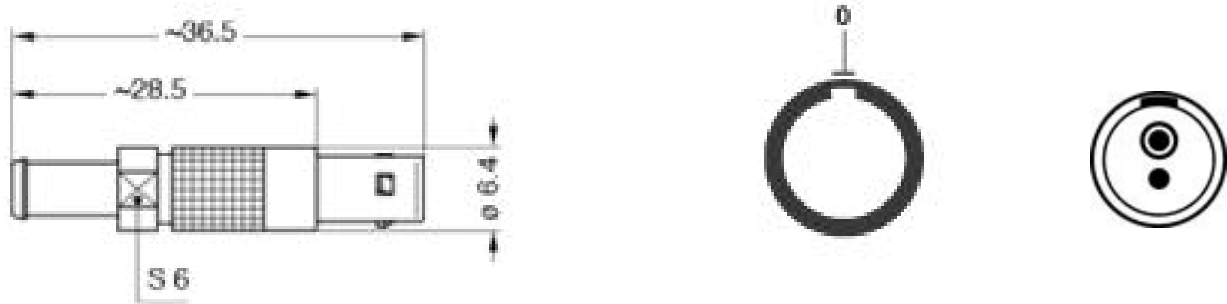

## Dimensions

	A	L	M	S1	S2
mm.	6.4	28.5	20.7	5.5	6
in.	0,25	1,12	0,81	0,22	0,24

# RECOMMENDED BY LEMO

## Tools

Caps: BFG.00.100.PCSG

## Cables

CMN.02.T28.030PGCE	PVC	GREY	
CMN.02.T28.030PGZE		Grey	
CMN.02.T28.030PNCE	PVC	Black	
CMN.02.T28.030PNZE			

Property of LEMO SA. All rights reserved  
 This document is not contractual

002 080	PVC	Grey	
CCX.50.RG1.74U30B	TFE	White	