

HS20 Incremental Optical Encoder



Model HS20 is a compact, rugged hollow-shaft encoder designed with harsh environments in mind. This optical encoder can be used where lighter duty encoders are not suitable or cost effective. The compact design makes it easy to incorporate into tight installations and is well-sealed to stand up to dust, dirt, and splashing liquids.



Other features include dual preloaded bearings for longevity and stability, differential line driver outputs for noise immunity and a standard, Euro-style 8-pin (M12 x1) sealed connector for easy connectivity. A specially designed, non-marring shaft clamp allows for easy installation and eliminates shaft damage should you need to reinstall or reposition the encoder on the shaft. Model HS20 is ideal for small motor applications and a number of harsh applications including off-highway agriculture and construction equipment.

Special Models of the HS20 Incremental Encoder are available with one or more of the following certifications. Consult factory for details.

EN 55011
and EN 61000-6-2

U.S. Standards Class I, Group A,B,C & D;
Class II Group E,F & G

IEC 12.0035X
 IECEx 12.0082X

Canadian Standards
Class I, Zone 0, Group IIC

CENELEC
II 1 G Ex ia IIB/IIC T4
II 3 G Ex nA IIB T3 Gc
II 3 G Ex nA IIB T4 Gc

Class I, Div 2, Group A,B,C & D;
Class II, Div 2, Group F & G

Mechanical Specifications

Shaft Bore: 5/8", 1/2", 1/4", metric available

Allowable Misalignment: 0.005 TIR, 0.010

Axial using R2 Tether

Bore Runout: 0.001 TIR

Starting Torque at 25°C: 3.5 in-oz (max)

Bearings: 52100 dual preloaded bearings

Shaft Material: Aluminum

Bearing Housing:

Aluminum with protective finish **Cover:** Aluminum with protective finish

Bearing Life: 7.5 X 10⁹ revs

Maximum RPM: 6000 (see frequency response)

Moment of Inertia: 3.4 X 10⁻⁴ oz-in-sec²

Weight: 8 ounces, maximum

Electrical Specifications

Code: Incremental output format; 2 channels in quadrature, with complements; 1/2 cycle index gated with negative B channel

Cycles Per Shaft Turn: 2 through 1024

Supply Voltage: 5–28 VDC ± 5%

Current Requirements: 100mA typical + output load, 250mA (max)

Voltage/Output: (see note 5)

28V/V: Line Driver, 5–28 VDC in, V_{out} = V_{in}

28V/5: Line Driver, 5–28 VDC in, V_{out} = 5 VDC

28V/OC: Open Collector, 5–28 VDC in, OC_{out}

(Higher frequency response may be available.

Please consult with the factory.)

Protection Level: Overvoltage, reverse voltage.

Outputs short-circuit protected (1 minute max) (see note 5)

Frequency Response: 100kHz

Output Termination Pinouts: see Table 1, back page

Environmental Specifications

Enclosure Rating: IP64

Temperature: 0–70° Standard

Shock: 50 g's for 11 msec duration

Vibration: 5–2000 Hz @ 20 g's


Humidity: 98% RH non-condensing

NOTES AND TABLES: All notes and tables referred to in the text can be found on the back page.

HS20 Incremental Ordering Options

FOR ASSISTANCE CALL 800-350-2727

Use this diagram, working from left to right to construct your model number (example: HS20-50-R2-SS-1024-ABZC-28V/V-K8).


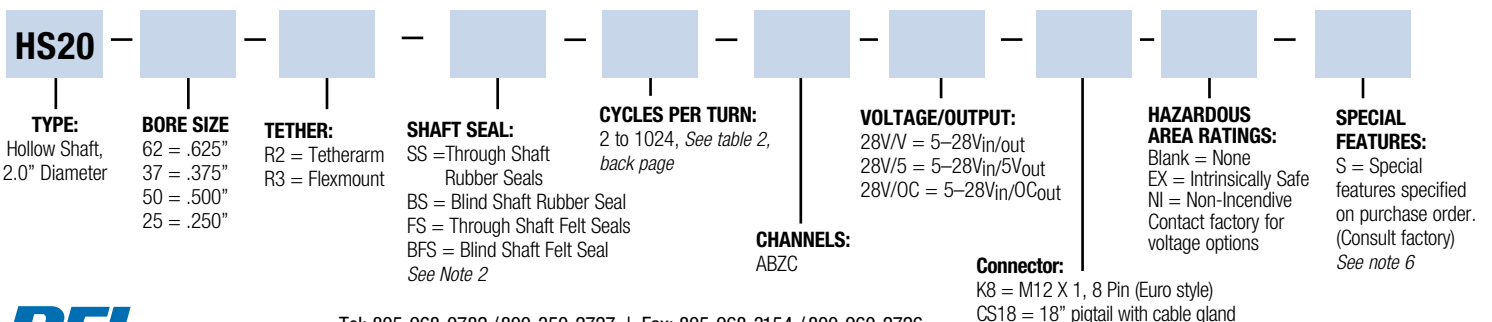


Tel: 805-968-0782 / 800-350-2727 | Fax: 805-968-3154 / 800-960-2726
7230 Hollister Ave., Goleta, CA 93117-2807 | www.beisensors.com


Specification No. 02082-001 Rev. 08-13

Dimensions

R2 Tether Arm

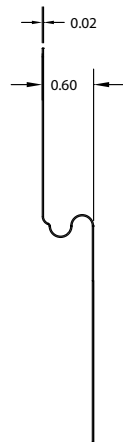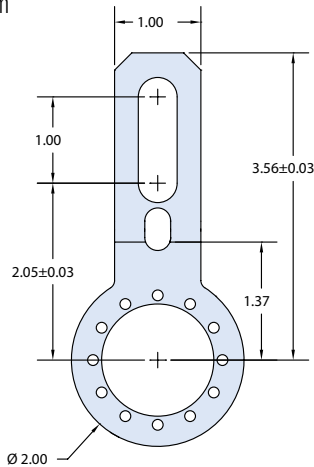

HS20 Diagram

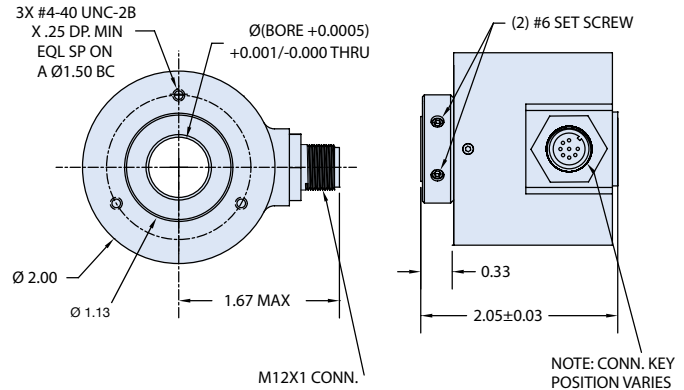

Tables and Figures

Table 1-Output Termination Pinouts

Pin (K8)	Wire	Function
1	YEL	A
4	BLU	B
6	ORN	Z
2	RED	+V (SUPPLY)
7	BLK	OV (CIRCUIT COMMON)
N/C	GRN	CASE GROUND
3	W/YEL	\overline{A}
5	W/BLU	\overline{B}
8	W/ORN	\overline{Z}

Table 2-HS20 Disc Resolutions


1*	2	3	5	6	8	10	11
12	24	25	30	32	40		
50	60	64	75	80	95		
100	105	115	120	125			
150	192	200	240	250			
256	300	336	360	400			
500	510	512	600	625			
635	720	785	1000	1024			
1200**							

Resolutions Shown in **RED** are not available as Express Encoders

*No index. For interpolation please specify the multiplied output (up to 4,096 for HS20) in the model number, i.e. 4,096-T4.

**Consult factory for this resolution

Figure 1
Output Waveform

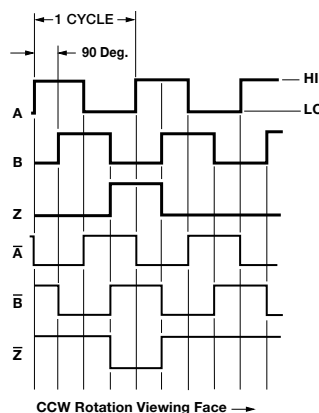

Notes

- The typical hollow shaft product is supported by, and clamped to, the driving shaft. A flexible tether is used to keep the housing from rotating.
- The rubber shaft seal is recommended in virtually all installations. The most common exceptions are applications requiring a very low starting torque or those requiring operation at both high temperature and high speed. For these exceptions, a felt shaft seal is recommended. Felt seals require very low starting torque and can virtually eliminate frictional heat. Encoders ordered with felt shaft seals will have an enclosure rating of IP50 and will have less than 1/10th the Starting Torque specified under Mechanical Configurations.
- Non-standard index widths and multiple indices are available by special order. Consult factory.
- Complementary outputs are recommended for use with line driver type (source/sink) outputs. When used with differential receivers, this combination provides a high degree of noise immunity.
- Output IC's:** Output IC's are available as either Line Driver (LD) or NPN Open Collector (OC) types. Open Collectors require pull-up resistors, resulting in higher output source impedance (sink impedance is similar to that of line drivers). In general, use of a Line Driver style output is recommended. Line Drivers source or sink current and their lower impedance mean better noise immunity and faster switching times. **Warning:** Do not connect any line driver outputs directly to circuit common/OV, which may damage the driver. Unused outputs should be isolated and left floating. Our applications specialists would be pleased to discuss your system requirements and the compatibility of your receiving electronics with Line Driver type outputs.
- 28V/V:** Multi-voltage Line Driver (7272*): 100 mA source/sink. Input voltage 5 to 28 VDC +/- 5% standard (Note: $V_{out} = V_{in}$). This driver is TTL compatible when used with 5 volt supply. Supply lines are protected against overvoltage to 60 volts and reverse voltage. Outputs are short circuit protected for one minute. Supply current is 120 mA typical (plus load current). This is the recommended replacement for 3904R and 7406R open collector outputs with internal pullup resistors. It is also a direct replacement for any 4469, 88C30, 8830 or 26LS31 line driver
- 28V/5:** Multi-voltage Line Driver (7272*): 100 mA source/sink. Input voltage 5 to 28 VDC +/- 5% standard, internally regulated with 5V (TTL compatible) logic out. Supply lines are protected against overvoltage to 60 volts and reverse voltage. Outputs are short circuit protected for one minute. Supply current is 90 mA typical (plus load current).
- 28V/OC:** NPN Open Collector (3904*, 7273*). Current sink of 80 mA max. Current sourced by external pull-up resistor. Output can be pulled up to voltage other than supply voltage (30 V max). Input voltage 5 to 28 VDC +/- 5% standard. Supply current is 120 mA typical. This replaces prior IC's with designations of 3904, 7406, 3302, 681 and 689.
- 5V/OCR, 15V/OCR, 24V/OCR:** Open Collector (3904R*, 7406R*, 7273R*): Current sink of 70 mA max. Includes internal pull-ups sized at approximately 100 ohms/volt. Max current source is 10 mA. Supply current is 100 mA typical, 120 mA with internal pull-ups. The 5V/OCR, 15V/OCR and 24V/OCR are often replaced by the 28V/V in system upgrades.
- 5V/V, 5V/OC, 5V/OCR and 9V/OC** can be intrinsically safe line driver and open collector outputs available on certain model variations. They are intrinsically safe only when installed per the control drawing noted on the certification label affixed to the encoder body.
- Special -S at the end of the model number is used to define a variety of non-standard features such as special shaft lengths, voltage options, or special testing. Please consult the factory to discuss your special requirements.
- Higher frequency response may be available. Please consult with the factory.
- Extended temperature ratings are available in the following ranges:
-40 to 70°C, -40 to 85°C, -20 to 105°C and -40 to 105°C depending on the particular model. Some models can operate down to -55°C. Extended temperature ranges can affect other performance factors. Consult with factory for more specific information.
- Mating plug receptacles and mating cable assemblies may be ordered from the factory.