


RECOMMENDED P.C.B. LAYOUT

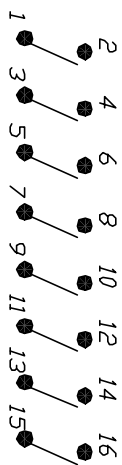

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) Copper w/Gold Plate
TERMINALS: BRASS w/Gold Plate
6. INSULATION RESISTANCE:
100 Mega-OHMS min. @500VDC
7. CONTACT RESISTANCE:
50 MILLI-OHMS typical @2-4VDC @100mA
8. OPERATING TEMP.:
-40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.

E-SWITCH®

| | | | | |
|------|---------|-------------------------|---------|------|
| B | 12293 | REVISED E-LOGD | 7/11/02 | CJB |
| A | 12227 | RELEASED FOR PRODUCTION | 6/14/02 | CJB |
| REV. | ECN No. | DESCRIPTION | DATE | CHKD |

| | | | | |
|-------|-------------|-----|---------|-----|
| SCALE | DATE | DR | DWG | REV |
| 2:1 | 6/14/02 | CJB | W823128 | B |
| TITLE | KAJ08 LA GT | | | |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED