


Flexi-Latch™ 2.00mm Pitch Right Angle FPC-to-Board Connector System

molex®

Flexi-Latch™ connectors provide secure mating assurance along with space and cost savings versus wire-to-board systems for rugged applications such as automotive lighting or industrial controls

Features and Benefits

Cable retention force of 20N	Provides secure mating retention force that meets automotive shock and vibration requirements
Positive inertia lock	Prevents partial cable insertion for secure mating
Audible click when mated	Offers additional mating assurance
Multiple polarizing keys	Prevent against incorrect cable insertion
-40 to 125 degrees operating temperature range	Meets automotive requirements
FPC retention tabs	Position cable for proper mating and prevent cable drop-out during assembly

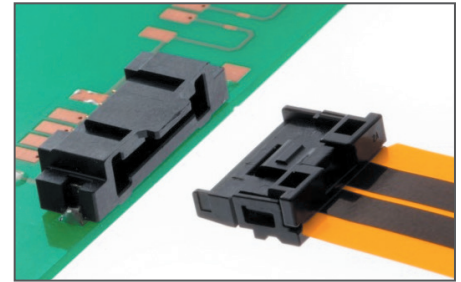

Flexi-Latch™ FPC-to-Board Connectors
505147 (left): Right-Angle PCB Connector;
505148 (right): Cable Plug Jacket

Markets and Applications

Home Appliances

LCD TVs

Industrial

Gaming/Pachinko Machines
Medical equipment
Lighting

Automotive & Transportation

Lighting
Comfort and Infotainment
Factory Automation equipment



Game Machines



Robots



Car Headlights



Car Audio

Specification

REFERENCE INFORMATION

Packaging:
Terminals: Reel; Housings: Bags; SMT PCB
Receptacles: Embossed Tape
Designed In: Millimeters
RoHS: Compliant
Halogen Free: Yes
Glow Wire Compatible: No

ELECTRICAL

Voltage (max.): 50V AC/DC
Current (max.): 1.5A max.
Contact Resistance: 40 milliohms max.
Dielectric Withstanding Voltage: 250V AC for 1 minute
Insulation Resistance: 50 Megohm min.

MECHANICAL

Durability (min.): 25 cycles
FPC Retention Force: 20N min.

PHYSICAL

Material:
Connector Housing: LCP, UL 94V-0, Black
Plug Jacket Housing: PBT, UL 94V-0 Black
Terminal: Copper Alloy
Plating:
Contact Area — Gold
Solder Tail Area — Tin
Underplating — Nickel
Operating Temperature: -40 to +125°C


Flexi-Latch™ 2.00mm Pitch Right Angle FPC-to-Board Connector System




Additional Product Features

Space and Cost Savings Versus Wire-to-Board

Flexi-Latch™ FPC Approach

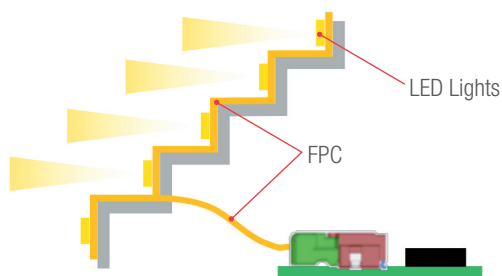

Wire-to-Board Approach

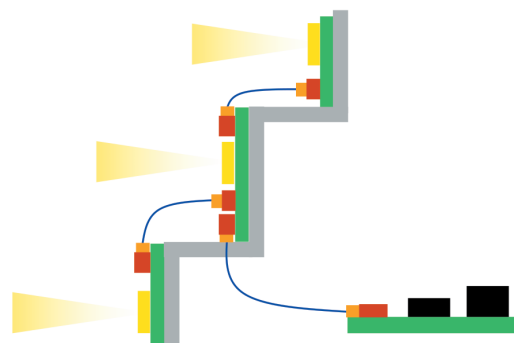


In applications such as automotive head-lights, the Flexi-Latch™ system provides space savings and reduced component costs versus wire-to-board connector systems

Clear Click Feeling for Secure Mating (20N of Cable Retention Force That Meets Automotive Shock and Vibration Requirements)


Before Mating

The height of the latch is lower than the guard, which contributes to the click feeling.

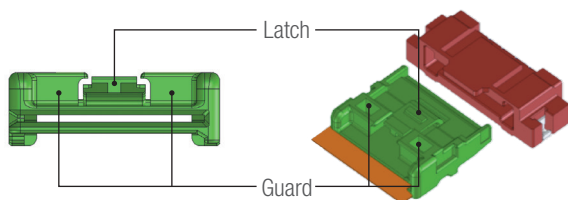


During Mating

There is a clear click feeling when fully mated



The operator's finger does not push down on the latch—like in many outer-lock designs—which allows for a better click feeling.



Ordering Information

Series No.	Circuit Size	Description
505147-0290	2	Right-Angle Connector
505147-0390	3	Right-Angle Connector
505147-0490	4	Right-Angle Connector
505148-0208	2	Cable Plug Jacket
505148-0308	3	Cable Plug Jacket
505148-0408	4	Cable Plug Jacket

www.molex.com/link/flexilatch.html