
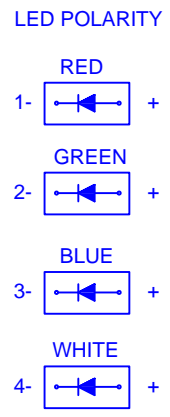
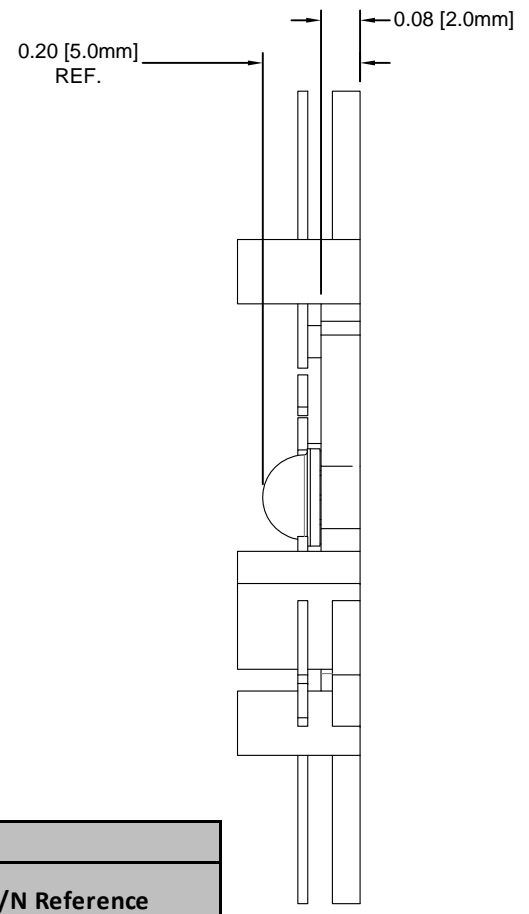


REV.	DESCRIPTION	DATE	APPROVED
F	Engineering Release	04/09/14	J. C.
G	Engineering Update w/o Changes	08/09/16	J. C.

For Use With:
 Wire Harness: BIVAR L2CON-24
 or
 Housing : LEOCO 2530S020000
 Terminal : LEOCO 2533TPB0000

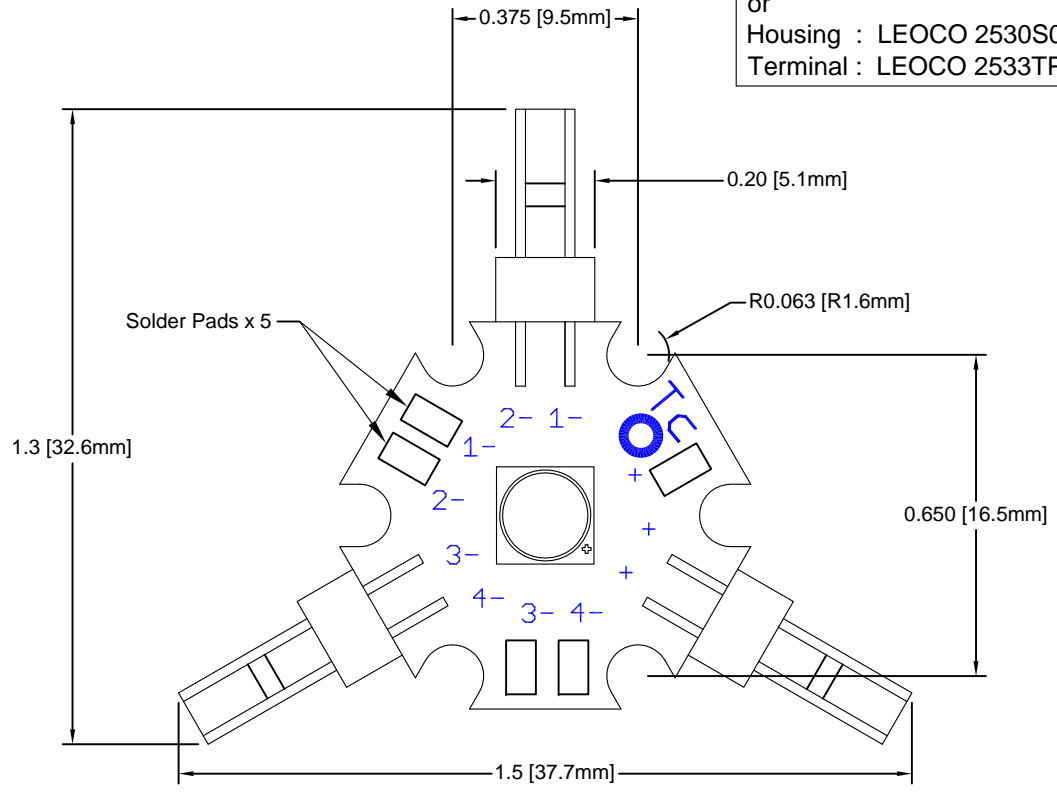

Part Number	LED P/N	Color	Dominant Wavelength (nm) / CCT (K)		Typical Luminous Flux (lm)	Cree P/N Reference
			Min.	Max.		
L22-MLRGBW	BDL-1483	Red	620	630	45.7	XMLCTW-A0-0000-00C3ABB02
		Green	520	535	87.4	
		Blue	450	465	13.9	
		Cool White	5700	8000	100	

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	ANGULAR
.X ± .1	X° ± 1°
.XX ± .02	
.XXX ± .010	

BIVAR[®]
 4 THOMAS, IRVINE, CA. 92618
 TEL: (949) 951-8808 FAX: (949) 951-3974

TITLE: L22 Starboard Light Engine

DESIGNED: B. Oliver **DATE:** 07/22/13

CHECKED: J. Chiang **DATE:** 07/22/13

PART NO: L22-MLRGBW **REVISION:** G

CAGE CODE : 32559 **SHEET #** 1 **OF** 1

CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.