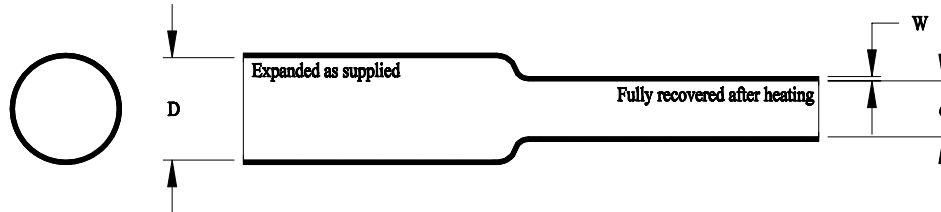


**NT**  
**Flexible, Flame Retarded,**  
**Modified Elastomer,**  
**Heat - Shrinkable Tubing**



**Table 1: Dimensions**

Size	As Supplied		Recovered							
	Inside Diameter		Inside Diameter		Wall Thickness (W)					
	Minimum (D)		Maximum (d)		Minimum		Maximum		Nominal	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
1/8	.125	3.18	.061	1.55	.019	0.48	.035	0.91	.027	0.69
3/16	.187	4.75	.100	2.54	.023	0.58	.043	1.09	.033	0.83

**Properties:**

Except as specified above, this tubing shall meet the requirements of Raychem Specification RT-510.

**Specification Control Drawing**

<b>tyco</b> <i>Electronics</i>	Tyco Electronics Corporation 300 Constitutional Drive Menlo Park, CA 94025 USA		<b>Raychem</b>	Title: <b>NT</b> <b>Flexible, Flame Retarded, Modified</b> <b>Elastomer, Heat - Shrinkable Tubing</b>		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : <b>NT</b>		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Oct-96	Rev.: C	Sheet: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.