


SECTION A-A

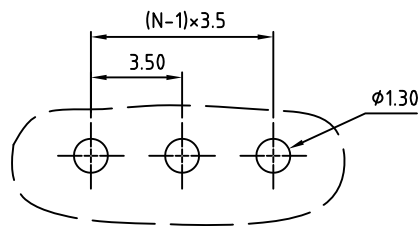

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
Δ	2014.01.07	updated operating temp.	Randy

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Insulating body: Thermoplastic (UL94V-0)
- Terminal screw: Steel Zinc plating "-" slot type
- Terminal body: Brass, Ni plated
- Contact: Brass, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 16-24
 - Stranded wire(AWG): 16-24
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C Δ
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: US

RoHS Compliant

PART NUMBER:

OSTERXX0151

No. of Poles	COLOR
02: 2 Poles	0: Black
03: 3 Poles	5: Green (Standard)
... ..	6: Blue
24: 24 Poles	8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTER 3.5 Series 90D, 2-24p	
PART NO.	OSTERXX0151	DWG NO.	OSTERXX0151.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
		Aaron 2006.10.04	Aaron 2006.10.04
		CUST NO.	
		SHEET: 01/01	
		Tolerance	
		X. ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X° ±1°	