


COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.0 VDC MAX, 15 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 4 MS MAX
	RELEASE 4 MS MAX
	CONTACT STABILIZATION TIME 2.5 MS MAX
	ALL OTHER REQUIREMENTS TO M39016/6-109M

CUSTOMER DATA SHEET

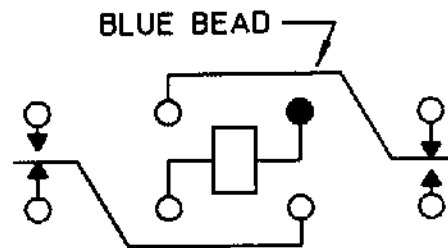

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE 100,000
OPERATIONS

DR. R.B. 11/19/93 CK. 11/19/93



CUST. DPL
CUST. NO. M39016/6-109M

TYPE "HFW" RELAY

HFW1201K45M